

# Latent RANSAC

## Supplementary Material

Simon Korman  
Weizmann Institute of Science, Israel

Roei Litman  
General Motors, Israel

### 1. Parameter selection

The parameters of our methods were fixed for all experiments in the main paper and the ones presented here. These values were empirically selected on synthetic data (disjoint from other experiments), in a procedure detailed below

#### 1.1. LR tolerance for inliers

We wish to verify that the collision tolerance in the latent space depends linearly on the inlier noise, much like its RANSAC counterpart. This, in turn, allows us to verify that we will not miss true collisions (prevent false negatives) that may fall too far in the latent domain. A synthetic experiment is performed on several randomly generated “ground-truth” models, each with a set noisy inliers. We then pick a minimal subset of inliers, and assess the resulting “hypothesis”, specifically the  $\ell_\infty$  distance from the ground-truth which is used by the Random-Grids. Figure 1 presents the median and 90 percentile of these measurements for different noise levels, for each of the three model types we present in the paper.

**Embedding ratio for  $SE(3)$ .** As mentioned in the paper, for both PnP and rigid-3d estimation problems, we parameterize the special Euclidean group  $SE(3)$  as a concatenation of two 3-tuples - one for rotation and one for translation. Figure 1 shows values separately for each of the two tuples. We chose a fixed tolerance ratio between rotation and translation for embedding based on the ratio of the incline for median distance (solid lines in Figure 1). The following values were used in all of our experiments:  $1.47 \frac{rad}{cm}$  for PnP, and  $3.6 \frac{rad}{cm}$  for rigid 3D.

#### 1.2. Latent tolerance vs. RANSAC tolerance

The previous experiment showed that, much like with RANSAC, the LR tolerance grows linearly with the inlier noise. Hence, there exists a ratio between RANSAC tolerance and that of LR. While this could be done using only inliers (in a synthetic setup, as in the previous experiment), we prefer to see the affect of the tolerance on the outliers as well as part of the complete RANSAC estimation pipeline.

Figure 2 depicts the performance of LR in terms of run-time and success rate, as a function of the tolerance value. We measure the tolerance w.r.t. the (fixed) value we used for RANSAC tolerance in all our runs. The chosen ratios (LR-threshold divided by RANSAC-threshold) are 8.75 for Homography, 1.75 for PnP and 1.74 for Rigid-3D.

### 2. Hash table implementation details

The hashing scheme presented in Section 2.2 in the paper can result in an integer  $\tau_v$  with a very large number of bits (e.g. over 32), which implies prohibitive memory allocation costs. A common workaround in the hashing literature is to map the result into a smaller range of size  $2^b$  which can be described by vectors of  $b$  bits. This can be done using any off-the-shelf standard hash function. In our case we simply take the original large number modulo a large prime number with  $b$  bits. Note that since any such ‘range shrinking’ hash function is in particular an injective function, it can not eliminate any original collisions. Taking a small number of bits  $b$  saves in memory, while potentially introducing false collisions (that are quickly discarded by a constant time test in the latent space). We take the size of the small range to be 10% of  $n = 5 \times 10^6$ , which is the maximal number of iterations allowed. In such a case, for a well behaved hash function, the expected number of false collisions is a small constant fraction of  $n$ .

### 3. Additional results

In this section we provide detailed results which extend those presented in the paper (for completeness we recite the summarized results (Tables 1 and 2 from the paper).

For homography estimation (extending Section 3.1 of the paper), we provide here our results on the dataset by Mikolajczyk *et al.* [3], being a golden standard evaluation benchmark for homography estimation. We use all possible ordered pairs of the ‘viewpoint’ sequences (each including 6 images): ‘graffiti-5’, ‘graffiti-4’, ‘bark’, ‘wall’ and ‘graffiti’.

Note that the estimation benchmark we put together (described in the paper) using the Zurich Buildings data-set

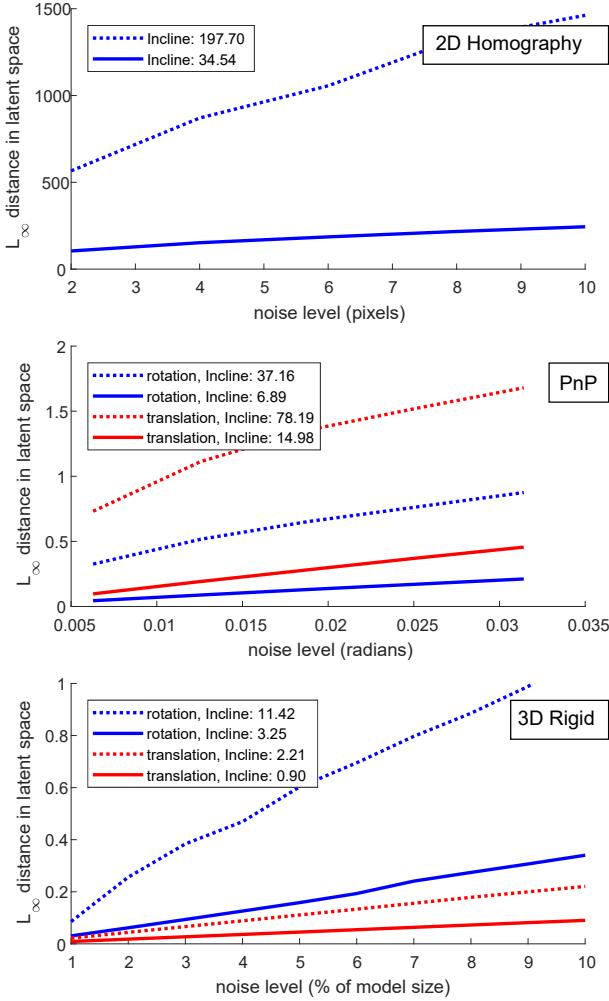


Figure 1. **Embedding  $\ell_\infty$  distance for noisy inliers.** For each of the three domains, we show the median (solid) and 90% (dotted)  $\ell_\infty$  distance between two inlier hypothesis, as a function of the inlier noise. As can be seen, the embedding distance grows linearly with the noise level, which is a desirable property, observable also in RANSAC tolerance. The resulting incline can be used to select LR tolerance. For PnP and rigid 3D we present the distance for rotation (blue) and translation (red) separately, allowing us to select embedding ratios for the two into the same space.

(ZuBuD) [4] is much larger (1878 vs. 73 pairs) and is much more challenging in terms of inlier rates. See Figure 3 for the cumulative inlier rate distribution in comparison to the other data-sets used in the paper.

For PnP estimation we extend Section 3.2 of the paper by adding a second sequence from the PoseNet data-set, the ‘Street’ scene that includes 2907 instances. The cumulative inlier rate distribution of Figure 3 shows that it is much more challenging compared to the ‘Old Hospital’ scene presented in the paper.

For each of the 4 data-sets, we provide summarizing ta-

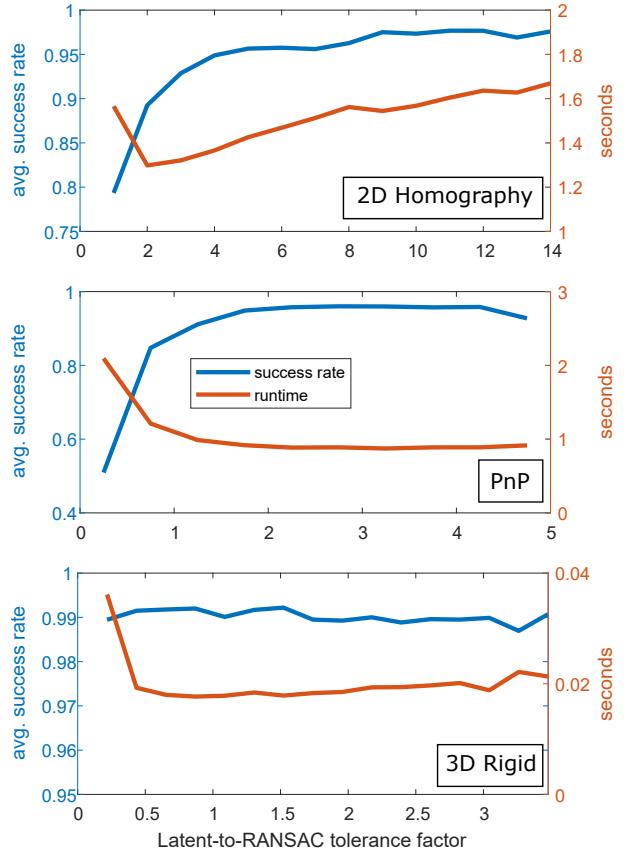


Figure 2. **Robustness of the LR tolerance.** For each of the three domains, we present the ratio between the (fixed) RANSAC tolerance and that of LR. Above a certain value the performance of LR is steady for PnP and rigid 3D, while a slight rise in runtime is evident for 2D homography

bles in Section 3.1, detailed component invocation and runtime analysis in Section 3.2 and finally - some detailed qualitative examples in Section 3.3.

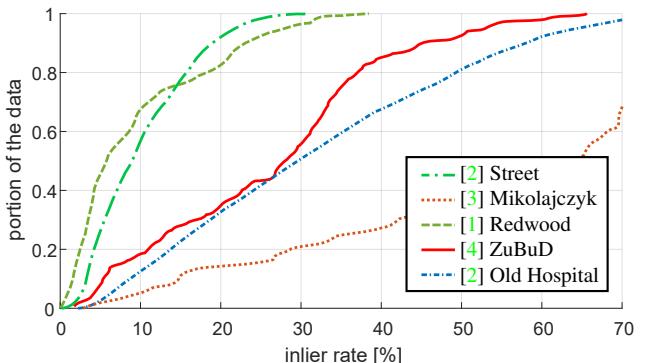


Figure 3. **Inlier rate cumulative distribution (CDF)** of the real data sets we use. The Mikolajczyk data-set [3] added here (compared to Figure 5 of the paper) can be seen to be much less challenging in terms of the distribution of inlier rates.

### 3.1. Summarizing tables

The following four tables provide summary results for each of the four tested data-sets, organized by ranges of inlier rates. For each inlier-rate range, we specify the number of instances, provide average and 95th percentile of runtime (in milliseconds), as well as average success rates (which are as a percentage of the optimal inlier rate).

Overall, LR performs in par with the other methods, but excels especially in the more challenging lower inlier rate cases. These data-sets include many such hard examples and hence the impact on the runtime and accuracy measured on the entire data-set can be very significant.

measure	method	inlier rate range (in %)			
		0-10	10-20	20-40	40-100
runtime avg. (95%) (millisecs)	RANSAC	1,490 (6,594)	35 (97)	5 (10)	<b>6 (9)</b>
	SPRT	<b>1,129</b> (4,659)	<b>23 (62)</b>	<b>4 (7)</b>	<b>6 (9)</b>
	LR	1,209 ( <b>4,626</b> )	32 (85)	7 (11)	9 (12)
success	RANSAC	<b>93.39%</b>	95.53%	96.28%	97.33%
	SPRT	88.57%	95.71%	96.27%	97.48%
	LR	93.07%	<b>95.88%</b>	<b>96.55%</b>	<b>97.59%</b>
# of instances		234	378	655	611

Table 1. 2D Homography fitting on Zurich Buildings [4]. Best results are shown in bold. See text for further details.

measure	method	inlier rate range (in %)			
		0-10	10-20	20-40	40-100
runtime avg. (95%) (millisecs)	RANSAC	4.2e4 (1.7e5)	2,336 (5,347)	190 (471)	41 (71)
	SPRT	2,760 (1.7e4)	40 ( <b>71</b> )	15 (20)	<b>12 (16)</b>
	LR	<b>913 (4,403)</b>	<b>39 (72)</b>	<b>14 (18)</b>	<b>12 (15)</b>
success	RANSAC	<b>95.54%</b>	98.13%	99.38%	99.12%
	SPRT	91.94%	<b>98.23%</b>	<b>99.40%</b>	<b>99.17%</b>
	LR	94.73%	98.14%	99.39%	99.11%
# of instances		29	27	91	35

Table 2. PnP fitting on the OldHospital scene from PoseNet [2]. Best results are shown in bold. See text for further details.

measure	method	inlier rate range (in %)			
		0-10	10-20	20-40	40-100
runtime avg. (95%) (millisecs)	RANSAC	3,324 (8,433)	36 (81)	6 (7)	<b>14 (22)</b>
	SPRT	2,395 (4,661)	<b>21 (46)</b>	<b>5 (7)</b>	<b>14 (22)</b>
	LR	<b>2,063 (4,631)</b>	28 (60)	8 (10)	17 (25)
success	RANSAC	<b>91.45%</b>	97.85%	99.11%	<b>99.41%</b>
	SPRT	61.86%	98.02%	99.30%	<b>99.41%</b>
	LR	90.32%	<b>98.04%</b>	<b>99.33%</b>	99.40%
# of instances		4	7	9	53

Table 3. Homography fitting on the Viewpoint sequences from the Mikolajczyk data-set [3]. Best results are shown in bold. See text for further details.

### 3.2. Additional empirical runtime analysis

In the right column of Figure 4 we reiterate the runtime breakdown presented in Figure 6 in the paper, for PnP estimation (on the ‘Old Hospital’ and ‘Street’ scenes of the

		inlier rate range (in %)		
measure	method	0-4	4-6	6-100
runtime avg. (95%) (millisecs)	RANSAC	8.6e4 (1.6e5)	2.9e4 (5.9e4)	4.2e3 (1.3e4)
	SPRT	2.4e4 (5.1e4)	1.4e3 (2.7e3)	<b>1.2e2</b> (3.7e2)
	LR	<b>2.3e3</b> ( <b>4.2e3</b> )	<b>8.8e2</b> ( <b>1.6e3</b> )	1.0e2 ( <b>2.9e2</b> )
success	RANSAC	<b>95.37%</b>	95.67%	98.83%
	SPRT	60.69%	<b>95.87%</b>	<b>98.84%</b>
	LR	89.89%	90.72%	97.95%
# of instances		844	1037	1026

Table 4. PnP fitting on the Street scene from PoseNet [2]. Best results are shown in bold. See text for further details.

PoseNet [2] dataset) and for homography estimation (on Mikolajczyk [3] and ZuBuD [4] data-sets). We also provide two additional views: In the left column, we show the ( $\log_{10}$  of the) average number of invocations per module, while in the middle column we show the relative module runtimes (i.e. as a fraction of the total runtime).

The left column (number of activations) emphasizes the fact that in the case of Latent-RANSAC each fitted model is then hashed (hence the equal number of fitting and hashing activations), while few hypotheses need to be verified (following a collision) compared to the other methods (notice the  $\log_{10}$  x-scale). Looking at the *relative* time per module (middle column), it is evident that Latent-RANSAC spends only a small fraction of its time on model verification in comparison with the other methods, while it needs to handle hypothesis hashing, which is much less time consuming. Notice also that LR requires a longer initialization time to set up the hash tables.

### 3.3. Qualitative examples

In tables 9, 10, 11 and 12 we collected several representative examples for each of the ‘Old Hospital’ and ‘Street’ scenes from the PoseNet dataset [2], the Mikolajczyk [3] and Zurich Buildings (ZuBuD) [4] dataset, respectively. All results are specified in median  $\pm$  std format, over 10, 2, 100 and 10 iterations per instance, for each of the data-set respectively.

**Figure 4. Details on sub-module invocations and runtimes**: This figure provides a detailed analysis of the execution of various sub-modules across four different datasets. The top section shows the frequency of module invocations (log<sub>10</sub> of the number of activations per module), while the bottom section shows their relative runtimes and average runtimes.

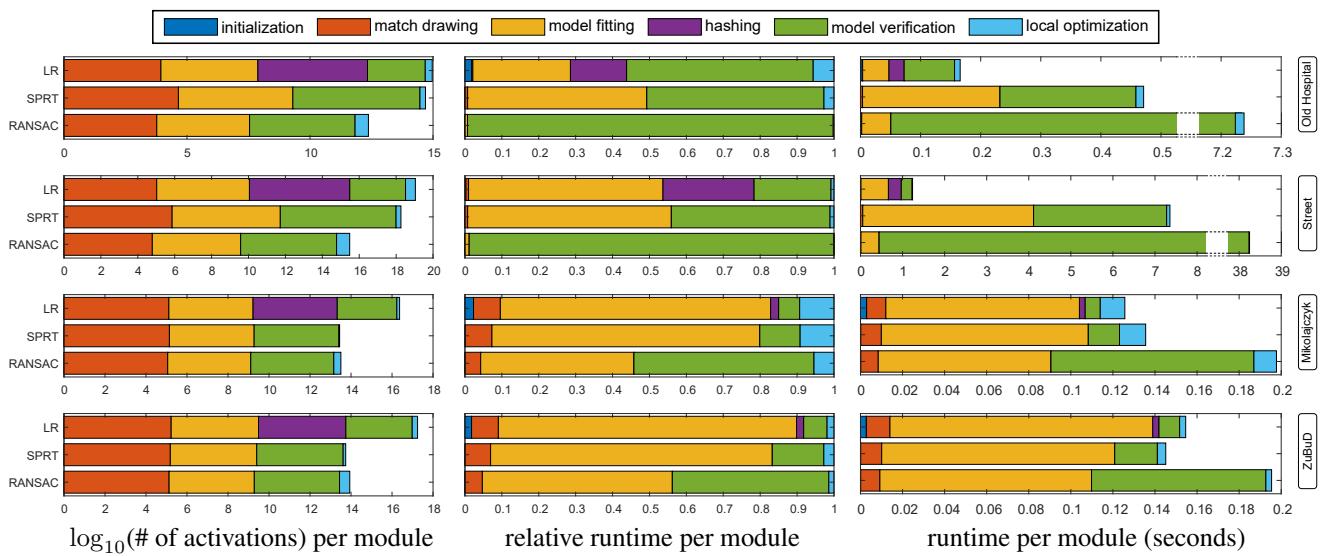


Figure 4. **Details on sub-module invocations and runtimes**: The presented values are averages (per single run) over the entire data. Each row corresponds to a different dataset - The top two rows relate to the ‘Old Hospital’ and ‘Street’ scenes from the PoseNet dataset [2], which we use for PnP estimation. The bottom two rows relate to the Mikolajczyk [3] and Zurich Buildings (ZuBuD) [4] dataset, which we use for Homography estimation. Each column gives a different kind of information; **left**  $\log_{10}$  of the number of times each module was invoked per single run. **middle**: module runtime as a fraction of total time. **bottom**: average runtime of each module.

<i>image pair</i>	<i>measure</i>	USAC	SPRT	LR
<b>Street image 2 frame 535</b> #matches: 8345 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	2.5±0.1 0.8±0.2 306037±24889 306037±24889 783585±64107 293.192±30.115	0.0±0.0 3.1±0.0 5000000±0 5000000±0 12812862±1737 41.311±0.848	2.4±0.2 0.5±0.0 467546±30370 467546±30370 4767±420 6.020±1.096
<b>Street image 1 frame 231</b> #matches: 4797 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	2.9±0.1 0.3±0.2 187160±10964 187160±10964 483498±28250 105.653±9.589	0.0±0.0 3.1±0.0 5000000±0 5000000±0 12911343±3440 41.944±0.746	2.8±0.1 0.4±0.0 323861±30751 323861±30751 3623±598 3.647±0.642
<b>Street image 2 frame 323</b> #matches: 5796 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	2.9±0.1 0.2±0.0 195970±19780 195970±19780 508034±51175 125.608±15.425	0.0±0.0 3.1±0.0 5000000±0 5000000±0 12969247±1982 41.823±0.331	2.8±0.1 0.4±0.0 326970±47173 326970±47173 3918±846 3.929±0.628
<b>Street image 2 frame 1212</b> #matches: 7518 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.2±0.1 0.7±0.0 142419±8773 142419±8773 380804±23487 129.371±9.946	3.2±1.7 0.4±1.4 4181223±1707519 4181223±1707519 11175766±4563988 38.178±15.573	3.1±0.1 0.4±0.0 219329±31236 219329±31236 3136±739 2.951±0.609
<b>Street image 2 frame 94</b> #matches: 1747 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.3±0.2 0.5±0.0 129519±21199 129519±21199 325452±53201 24.603±3.649	3.2±1.7 0.4±1.4 3492047±1685548 3492047±1685548 8783411±4240297 27.864±13.291	3.1±0.1 0.4±0.0 244691±37878 244691±37878 2018±436 2.171±0.252
<b>Street image 2 frame 880</b> #matches: 6683 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.5±0.1 0.3±0.5 108629±5369 108629±5369 303855±14732 88.889±7.535	3.5±0.1 0.3±0.2 402561±154146 402561±154146 1126568±431003 3.989±1.257	3.4±0.1 0.7±0.2 171161±12160 171161±12160 3618±476 2.519±0.389
<b>Street image 2 frame 2392</b> #matches: 2954 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.5±0.2 0.7±0.1 111756±13065 111756±13065 286412±33513 35.420±5.480	3.5±0.1 0.4±0.1 300486±91916 300486±91916 769610±235189 2.908±0.657	3.3±0.2 0.5±0.0 184796±23830 184796±23830 1523±278 1.850±0.378
<b>Street image 2 frame 628</b> #matches: 4789 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.8±0.1 0.8±0.0 82497±4777 82497±4777 217991±12614 45.438±5.229	3.9±0.1 0.5±0.0 182585±15613 182585±15613 483672±41081 1.987±0.148	3.6±0.2 0.4±0.0 135563±21892 135563±21892 1520±361 1.522±0.258

Table 5. STREET SUBSET on pnp dataset.

<i>image pair</i>	<i>measure</i>	USAC	SPRT	LR
<b>Street image 2 frame 11</b> #matches: 3067 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.4±0.3 0.7±0.2 127107±24168 127107±24168 320979±60997 39.850±7.647	3.5±1.2 0.4±0.9 1554596±1303455 1554596±1303455 3919077±3288015 12.853±10.419	2.9±0.2 0.5±0.1 272706±45448 272706±45448 2204±556 2.448±0.541
<b>Street image 2 frame 1666</b> #matches: 7010 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.2±0.0 2.3±0.1 65015±492 65015±492 172052±1366 54.031±4.484	4.2±0.0 2.2±0.1 135570±9172 135570±9172 359514±24156 1.278±0.106	4.1±0.3 1.5±0.5 93418±30836 93418±30836 846±465 1.161±0.467
<b>Street image 2 frame 1125</b> #matches: 5643 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.0±0.2 2.8±1.3 81631±10960 81631±10960 212994±28781 51.271±6.048	4.1±0.2 0.5±0.8 204675±41212 204675±41212 533496±107449 2.254±0.375	3.3±0.2 0.4±0.2 190577±23379 190577±23379 2597±467 2.158±0.423
<b>Street image 2 frame 240</b> #matches: 5883 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.2±0.0 2.2±0.0 60704±495 60704±495 158126±1164 41.052±1.998	4.2±0.0 2.8±0.0 126088±9888 126088±9888 327457±25629 1.164±0.083	4.2±0.0 2.5±0.0 84986±533 84986±533 518±19 0.875±0.097
<b>Street image 2 frame 1680</b> #matches: 7313 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.5±0.0 0.9±0.0 52444±573 52444±573 139939±1494 46.688±4.115	4.5±0.0 0.7±0.0 103368±8042 103368±8042 275663±21392 0.934±0.092	4.5±0.0 0.4±0.0 73422±733 73422±733 510±20 0.862±0.083
<b>Street image 2 frame 638</b> #matches: 2435 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.3±0.1 0.8±0.1 58203±5124 58203±5124 147051±13042 14.777±1.767	4.3±0.1 0.5±0.0 133526±12030 133526±12030 337307±30361 1.172±0.113	3.8±0.4 0.5±0.0 147731±50759 147731±50759 889±429 1.058±0.546
<b>Street image 2 frame 2258</b> #matches: 8043 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.7±0.0 1.6±0.0 45057±152 45057±152 114502±512 41.804±2.848	4.7±0.0 1.5±0.0 86100±6798 86100±6798 218806±17224 0.776±0.057	4.7±0.0 1.5±0.0 63080±6191 63080±6191 366±55 0.670±0.090
<b>Street image 2 frame 1390</b> #matches: 3910 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.6±0.1 0.3±0.0 46777±3889 46777±3889 125606±10455 20.304±2.659	4.6±0.1 0.4±0.1 90591±9725 90591±9725 242952±26149 1.071±0.115	4.4±0.2 0.4±0.0 79851±10445 79851±10445 1082±218 0.790±0.182

Table 6. STREET SUBSET on pnp dataset.

<i>image pair</i>	<i>measure</i>	USAC	SPRT	LR
<b>Street image 2 frame 604</b> #matches: 3757 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.8±0.1 2.4±0.0 41841±1644 41841±1644 109549±4361 17.572±1.286	4.9±0.1 2.7±0.0 74948±3271 74948±3271 196167±8754 0.638±0.027	4.8±0.1 2.8±0.0 62711±32819 62711±32819 355±289 0.677±0.363
<b>Street image 2 frame 258</b> #matches: 2127 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.7±0.3 0.6±0.0 47020±9372 47020±9372 121312±24211 10.804±2.424	4.7±0.2 0.3±0.0 79779±19126 79779±19126 205828±49464 0.707±0.175	4.0±0.3 0.4±0.0 102716±20137 102716±20137 751±216 0.941±0.289
<b>Street image 1 frame 155</b> #matches: 8064 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.8±0.1 0.8±0.3 42093±3754 42093±3754 109315±9719 40.997±4.340	4.8±0.2 0.3±0.3 81062±8369 81062±8369 210591±21876 0.703±0.085	4.7±0.2 0.4±0.3 63576±8158 63576±8158 414±86 0.652±0.112
<b>Street image 2 frame 2439</b> #matches: 6287 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	5.3±0.0 2.0±0.0 30698±217 30698±217 75692±518 21.293±1.446	5.3±0.0 2.0±0.1 52672±3010 52672±3010 130108±7439 0.440±0.020	5.3±0.0 2.0±0.0 43365±9916 43365±9916 143±33 0.407±0.122
<b>Street image 2 frame 1908</b> #matches: 5187 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	6.0±0.0 2.7±0.0 21147±231 21147±231 55818±700 12.741±1.143	6.0±0.0 2.7±0.0 34980±1817 34980±1817 92217±4813 0.305±0.014	6.0±0.0 2.5±0.0 29465±2816 29465±2816 156±37 0.318±0.049
<b>Street image 2 frame 1236</b> #matches: 4241 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	6.9±0.0 2.3±0.0 14243±169 14243±169 39898±453 7.227±0.598	6.9±0.0 1.6±0.0 22629±1736 22629±1736 63106±4902 0.200±0.010	6.9±0.0 0.0±0.0 20253±570 20253±570 161±16 0.229±0.032
<b>Street image 2 frame 1179</b> #matches: 5501 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	8.4±0.1 0.4±0.0 7718±216 7718±216 21428±636 5.225±0.389	8.4±0.1 0.2±0.0 11311±599 11311±599 31689±1670 0.112±0.013	8.4±0.1 1.4±0.0 10841±548 10841±548 79±11 0.126±0.019
<b>Street image 2 frame 1532</b> #matches: 6711 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	8.6±0.1 2.2±0.1 7241±128 7241±128 19629±436 6.057±0.340	8.6±0.0 1.9±0.0 10261±874 10261±874 27720±2378 0.090±0.003	8.6±0.0 0.8±0.0 10351±1907 10351±1907 30±10 0.115±0.024

Table 7. STREET SUBSET on pnp dataset.

<i>image pair</i>	<i>measure</i>	USAC	SPRT	LR
<b>Street image 2 frame 2145</b> #matches: 5395 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	9.1±0.2 0.3±0.0 6179±304 6179±304 16636±863 3.920±0.275	9.1±0.1 0.3±0.0 8892±424 8892±424 23917±1179 0.078±0.006	9.1±0.1 0.3±0.0 8651±304 8651±304 33±6 0.096±0.010
<b>Street image 2 frame 1153</b> #matches: 4088 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	12.2±0.0 1.1±0.0 2559±11 2559±11 6758±58 1.223±0.113	12.2±0.0 1.7±0.0 3346±267 3346±267 8758±684 0.028±0.002	12.2±0.0 2.8±0.0 3605±9 3605±9 11±3 0.037±0.006
<b>Street image 2 frame 1806</b> #matches: 8868 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	13.5±0.0 1.6±0.0 1884±6 1884±6 4588±34 1.888±0.116	13.5±0.0 1.8±0.0 2391±109 2391±109 5887±321 0.031±0.003	13.5±0.0 2.1±0.0 2632±240 2632±240 8±5 0.038±0.007
<b>Street image 2 frame 972</b> #matches: 4606 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	15.1±0.0 1.1±0.0 1338±11 1338±11 3467±68 0.719±0.054	15.1±0.0 2.2±0.0 1510±133 1510±133 3949±313 0.021±0.003	15.1±0.0 2.5±0.0 1874±14 1874±14 5±2 0.028±0.003
<b>Street image 1 frame 16</b> #matches: 4742 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	16.4±0.0 1.7±0.0 1036±3 1036±3 2554±42 0.533±0.050	16.4±0.0 2.4±0.0 1184±102 1184±102 2975±226 0.016±0.002	16.4±0.0 2.1±0.0 1454±19 1454±19 6±3 0.022±0.003
<b>Street image 2 frame 2022</b> #matches: 5155 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	18.1±0.1 0.9±0.0 780±10 780±10 1999±38 0.461±0.033	18.1±0.2 0.9±0.0 951±47 951±47 2460±133 0.016±0.003	18.1±0.1 1.1±0.0 1088±28 1088±28 7±3 0.021±0.005

Table 8. STREET SUBSET on pnp dataset.

<i>image pair</i>	<i>measure</i>	USAC	SPRT	LR
<b>OldHospital seq 8 frame 12</b> #matches: 9917 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	2.9±0.1 0.5±0.1 190937±11435 190937±11435 625489±37275 270.965±20.834	0.0±0.0 3.1±0.0 5000000±0 5000000±0 16368915±1753 49.785±2.298	2.9±0.1 0.4±0.1 256422±34273 256422±34273 10876±2160 6.854±1.331
<b>OldHospital seq 8 frame 11</b> #matches: 9141 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.4±0.1 0.2±0.0 121599±10152 121599±10152 396913±33382 159.486±12.493	3.3±1.1 0.2±0.9 1474533±1367665 1474533±1367665 4816358±4466653 14.436±13.681	3.3±0.1 0.2±0.0 185116±25802 185116±25802 6797±1386 4.218±0.800
<b>OldHospital seq 4 frame 13</b> #matches: 6453 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.9±0.1 0.4±0.1 79639±5514 79639±5514 260535±17996 71.379±6.032	3.9±0.1 0.4±0.0 198060±53450 198060±53450 647721±174581 2.139±0.606	3.9±0.2 0.4±0.1 112847±20268 112847±20268 3446±914 1.851±0.448
<b>OldHospital seq 4 frame 14</b> #matches: 6844 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.0±0.2 0.5±0.0 78912±11047 78912±11047 258933±36148 74.721±11.198	3.9±0.1 0.5±0.0 190539±42492 190539±42492 624737±139455 2.147±0.422	3.9±0.2 0.5±0.0 117709±31943 117709±31943 3606±1639 1.989±0.749
<b>OldHospital seq 4 frame 16</b> #matches: 6915 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	5.5±0.1 0.6±0.0 28518±1020 28518±1020 93563±3341 28.043±1.073	5.5±0.1 0.6±0.0 49230±3542 49230±3542 161974±11598 0.523±0.048	5.5±0.1 0.6±0.0 39766±1828 39766±1828 664±69 0.499±0.036
<b>OldHospital seq 8 frame 7</b> #matches: 8608 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	9.9±0.1 0.2±0.0 4729±106 4729±106 15476±332 5.785±0.229	9.9±0.1 0.2±0.0 6479±544 6479±544 21121±1802 0.078±0.006	10.0±0.1 0.2±0.0 6552±110 6552±110 35±6 0.077±0.007
<b>OldHospital seq 4 frame 46</b> #matches: 8240 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	18.7±0.2 0.4±0.0 703±24 703±24 2330±80 0.869±0.041	18.7±0.2 0.4±0.0 850±71 850±71 2825±253 0.025±0.005	18.7±0.0 0.4±0.0 983±81 983±81 6±3 0.024±0.006
<b>OldHospital seq 8 frame 99</b> #matches: 5182 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	67.1±0.0 0.1±0.0 13±0 13±0 43±3 0.018±0.004	67.1±0.1 0.1±0.0 14±1 14±1 47±4 0.011±0.005	67.1±0.1 0.1±0.0 19±3 19±3 4±2 0.011±0.002

Table 9. Homography estimation on OldHospital scene from PoseNet [2].

<i>image pair</i>	<i>measure</i>	USAC	SPRT	LR
<b>Street image 1 frame 116</b> #matches: 9685 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	2.3±0.0 0.6±0.2 401039±11679 401039±11679 1009308±28697 489.618±12.470	0.0±0.0 3.1±0.0 5000000±0 5000000±0 12573043±6628 50.370±9.862	2.2±0.2 0.6±0.1 496675±672 496675±672 4885±291 6.918±0.305
<b>Street image 1 frame 114</b> #matches: 10316 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	2.3±0.0 0.7±0.0 382183±10283 382183±10283 962421±27524 498.683±16.713	0.0±0.0 3.1±0.0 5000000±0 5000000±0 12592970±20 56.789±1.455	2.1±0.0 0.5±0.1 496384±467 496384±467 4808±65 7.193±0.122
<b>Street image 2 frame 627</b> #matches: 5358 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.5±0.1 0.3±0.0 107958±13405 107958±13405 278493±35150 71.865±9.081	3.5±0.0 0.3±0.0 262518±28080 262518±28080 675917±72078 3.371±0.401	3.3±0.1 0.6±0.0 202990±11599 202990±11599 1826±162 2.392±0.140
<b>Street image 2 frame 2154</b> #matches: 4313 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.8±0.0 1.2±0.0 86845±0 86845±0 225467±394 40.972±7.438	3.8±0.0 2.4±0.0 208184±54279 208184±54279 541280±141451 2.504±0.475	3.8±0.0 2.3±0.0 120471±1573 120471±1573 793±16 1.289±0.055
<b>Street image 2 frame 2061</b> #matches: 4423 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.7±0.0 2.5±0.0 45886±473 45886±473 118623±1136 24.092±2.474	4.7±0.0 0.9±0.0 89092±3214 89092±3214 230151±7868 0.894±0.128	4.7±0.0 0.9±0.0 63312±651 63312±651 292±8 0.634±0.043
<b>Street image 2 frame 2138</b> #matches: 5056 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	6.9±0.0 1.1±0.0 13993±170 13993±170 37579±440 8.137±1.451	6.9±0.0 2.3±0.0 22306±297 22306±297 59905±802 0.226±0.061	6.9±0.0 2.3±0.0 19423±235 19423±235 103±4 0.210±0.027
<b>Street image 2 frame 1584</b> #matches: 5859 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	15.7±0.0 0.6±0.0 1197±3 1197±3 2973±26 0.776±0.121	15.7±0.0 2.3±0.0 1508±3 1508±3 3723±58 0.023±0.004	15.7±0.0 2.1±0.0 1671±4 1671±4 5±3 0.025±0.007
<b>Street image 2 frame 2116</b> #matches: 4381 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	32.3±0.1 0.4±0.0 144±14 144±14 405±30 0.096±0.023	32.4±0.1 2.8±0.0 145±5 145±5 393±24 0.015±0.004	32.4±0.1 2.7±0.0 188±1 188±1 5±2 0.018±0.005

Table 10. PnP estimation on Street scene from PoseNet [2].

<i>image pair</i>	<i>measure</i>	USAC	SPRT	LR
<b>graffiti viewpoint views 2 6</b> #matches: 662 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	2.3±0.5 15.0±313.8 5000006±10 488523±653 488523±653 8.131±0.409	0.0±0.0 1056.0±0.0 5000006±12 488566±621 488566±621 4.372±0.166	2.0±0.5 32.1±298.7 5000007±7 488503±771 38333±530 4.298±0.157
<b>graffiti viewpoint views 1 5</b> #matches: 586 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.9±0.3 7.0±10.1 2529197±607021 247761±59429 247761±59429 4.053±0.922	3.8±1.9 7.6±523.4 4833036±566999 473514±55468 473514±55468 4.234±0.468	3.9±0.2 7.0±7.4 3540872±482973 346584±47182 17316±3438 2.924±0.440
<b>graffiti 5 viewpoint views 2 6</b> #matches: 641 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	6.7±0.2 3.4±0.9 260050±105907 25276±10239 25276±10239 0.420±0.168	6.7±0.3 3.4±1.1 293066±121956 28427±11742 28427±11742 0.259±0.105	6.7±0.3 3.4±2.1 364065±146559 35331±14200 843±670 0.297±0.125
<b>wall viewpoint views 1 6</b> #matches: 722 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	8.0±0.2 3.1±0.7 121882±15614 12186±1568 12186±1568 0.213±0.032	8.0±0.0 3.1±0.1 131513±5968 13108±624 13108±624 0.117±0.009	8.0±0.0 3.3±0.2 170633±3328 17020±366 474±31 0.144±0.009
<b>graffiti viewpoint views 2 5</b> #matches: 688 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	10.3±0.3 2.2±1.3 43873±6035 4590±634 4590±634 0.079±0.012	10.3±0.2 2.2±0.6 45345±3377 4716±357 4716±357 0.044±0.004	10.3±0.2 2.2±0.7 61412±4514 6365±467 81±14 0.056±0.005
<b>graffiti 5 viewpoint views 3 6</b> #matches: 724 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	10.9±0.2 3.4±0.5 34802±4220 3867±487 3867±487 0.067±0.009	10.9±0.1 3.4±0.4 35550±1224 3977±157 3977±157 0.036±0.003	10.9±0.1 3.4±0.5 48720±1671 5410±189 50±8 0.047±0.004
<b>bark Z R views 1 6</b> #matches: 726 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	14.6±0.0 7.0±0.2 10647±164 999±31 999±31 0.019±0.002	14.6±0.0 7.0±0.2 11291±1041 1055±102 1055±102 0.011±0.001	14.6±0.0 7.0±0.2 14903±99 1391±44 11±3 0.016±0.001
<b>graffiti 4 viewpoint views 1 4</b> #matches: 1117 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	59.6±0.0 0.8±0.5 36±2 12±3 12±3 0.009±0.003	59.6±0.0 0.8±0.6 38±3 13±3 13±3 0.010±0.003	59.6±0.0 0.8±0.5 50±8 18±4 3±2 0.012±0.002

Table 11. Homography estimation on the Viewpoint sequences of Mikolajczyk data-set [3].

<i>image pair</i>	<i>measure</i>	USAC	SPRT	LR
<b>object 155 views 1 3</b> #matches: 537 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	2.0±0.1 537.0±371.6 5000012±6 485267±605 485267±605 7.668±0.719	0.0±0.0 1056.0±0.0 5000007±10 485723±696 485723±696 4.027±0.332	2.0±0.2 141.9±95.9 5000005±6 485388±653 53017±584 4.198±0.304
<b>object 116 views 4 5</b> #matches: 588 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	3.1±0.3 16.8±18.3 5000002±99271 710936±13857 710936±13857 10.731±1.330	0.0±0.0 1056.0±0.0 5000003±5 711802±850 711802±850 5.743±0.417	3.1±0.4 19.5±19.6 5000009±26 711487±541 69490±379 6.045±0.454
<b>object 24 views 1 5</b> #matches: 516 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	4.2±0.3 54.7±108.9 2436982±766168 257719±81008 257719±81008 3.649±1.337	4.5±0.3 35.2±23.8 2775656±1308085 293699±138493 293699±138493 2.425±1.303	4.4±0.4 48.7±84.7 3088939±1194400 326644±126262 26538±13660 2.798±1.159
<b>object 109 views 2 5</b> #matches: 523 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	5.0±0.2 65.1±31.0 972392±150149 104526±15924 104526±15924 1.555±0.376	5.0±0.2 53.0±23.4 1256870±308441 134885±32910 134885±32910 1.181±0.301	5.0±0.1 26.2±28.6 1329033±412427 142500±44333 8988±4384 1.176±0.450
<b>object 122 views 4 5</b> #matches: 442 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	7.6±0.2 47.0±23.2 181624±24310 28236±3788 28236±3788 0.365±0.057	7.7±0.4 47.4±24.6 202088±28949 31074±4427 31074±4427 0.253±0.058	7.7±0.3 43.1±25.5 218094±34407 33746±5316 3176±698 0.272±0.054
<b>object 116 views 2 5</b> #matches: 407 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	14.0±0.1 3.1±0.7 13134±285 1643±51 1643±51 0.021±0.002	14.0±0.1 3.1±0.8 13267±547 1680±62 1680±62 0.015±0.001	14.0±0.0 3.1±0.3 18388±8 2283±32 36±5 0.020±0.003
<b>object 69 views 1 3</b> #matches: 316 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	33.2±0.0 5.1±0.0 396±4 74±10 74±10 0.002±0.000	33.2±0.0 5.1±0.0 396±9 81±5 81±5 0.002±0.000	33.2±0.0 5.1±0.3 554±133 111±18 4±2 0.005±0.000
<b>object 167 views 3 5</b> #matches: 949 	inlier rate (%) Sampson err. #samples #fitting #verification runtime [sec]	85.8±0.0 2.4±0.3 6±0 5±1 5±1 0.013±0.004	85.8±0.0 2.4±0.2 7±1 5±1 5±1 0.012±0.001	85.8±0.0 2.4±0.0 9±1 8±1 4±1 0.015±0.001

Table 12. Homography estimation on Zurich Buildings [4].

## References

- [1] S. Choi, Q.-Y. Zhou, and V. Koltun. Robust reconstruction of indoor scenes. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015. [2](#)
- [2] A. Kendall, M. Grimes, and R. Cipolla. Posenet: A convolutional network for real-time 6-dof camera re-localization. In *Computer Vision (ICCV), 2015 IEEE International Conference on*, pages 2938–2946. IEEE, 2015. [2](#), [3](#), [4](#), [9](#), [10](#)
- [3] K. Mikolajczyk and C. Schmid. Scale & affine invariant interest point detectors. *International journal of computer vision*, 60(1):63–86, 2004. [1](#), [2](#), [3](#), [4](#), [11](#)
- [4] H. Shao, T. Svoboda, and L. Van Gool. Zubud - zurich buildings database for image based recognition. *Computer Vision Lab, Swiss Federal Institute of Technology, Switzerland, Tech. Rep*, 260:20, 2003. [2](#), [3](#), [4](#), [12](#)