Parsimonious Optimal Dynamic Partial Order Reduction

Parosh Aziz Abdulla¹, Mohamed Faouzi Atig¹, Sarbojit Das¹, Bengt Jonsson¹, and Konstantinos Sagonas^{1,3}

Uppsala University, Uppsala, Sweden
 National Technical University of Athens, Athens, Greece

Abstract. Stateless model checking is a fully automatic verification technique for concurrent programs that checks for safety violations by exploring all possible thread schedulings. It becomes effective when coupled with Dynamic Partial Order Reduction (DPOR), which introduces an equivalence on schedulings and reduces the amount of needed exploration. DPOR algorithms that are optimal are particularly effective in that they guarantee to explore exactly one execution from each equivalence class. Unfortunately, existing sequence-based optimal algorithms may in the worst case consume memory that is exponential in the size of the analyzed program. In this paper, we present Parsimonious-OPtimal DPOR (POP), an optimal DPOR algorithm for analyzing multi-threaded programs under sequential consistency, whose space consumption is polynomial in the worst case. POP combines several novel algorithmic techniques, including (i) a parsimonious race reversal strategy, which avoids multiple reversals of the same race, (ii) an eager race reversal strategy to avoid storing initial fragments of to-be-explored executions, and (iii) a space-efficient scheme for preventing redundant exploration, which replaces the use of sleep sets. Our implementation in Nidhugg shows that these techniques can significantly speed up the analysis of concurrent programs, and do so with low memory consumption. Comparison to a related optimal DPOR algorithm for a different representation of concurrent executions as graphs shows that POP has comparable worst-case performance for smaller benchmarks and outperforms the other one for larger programs.

1 Introduction

Testing and verification of multi-threaded programs is challenging, since it requires reasoning about all the ways in which operations executed by different threads can interfere. A successful technique for finding concurrency bugs in multithreaded programs and for verifying their absence is *stateless model checking* (SMC) [18]. Given a terminating program and fixed input data, SMC systematically explores the set of all thread schedulings that are possible during program runs. A dedicated runtime scheduler drives the SMC exploration by making decisions on scheduling whenever such choices may affect the interaction between threads. Given enough time, the exploration covers all possible executions and detects any unexpected program results, program crashes, or assertion violations. The

technique is entirely automatic, has no false positives, does not consume excessive memory, and can reproduce the concurrency bugs it detects. SMC has been implemented in many tools (e.g., VeriSoft [19], CHESS [37], Concuerror [13], NIDHUGG [2], rInspect [46], CDSCHECKER [39], RCMC [26], and GENMC [32]), and successfully applied to realistic programs (e.g., [20] and [30]).

To reduce the number of explored executions, SMC tools typically employ dynamic partial order reduction (DPOR) [1,16,26]. DPOR defines an equivalence relation on executions, typically Mazurkiewicz trace equivalence [34], which preserves many important correctness properties, such as reachability of local states and assertion violations, and explores at least one execution in each equivalence class. Thus, to analyze a program, it suffices to explore one execution from each equivalence class. DPOR was originally developed for models of concurrency [16], where executions are expressed as sequences of interactions between threads/processes and shared objects. Subsequently, sequence-based DPOR has been adapted and refined to a number of programming models, including actor programs [44], abstract computational models [25], event driven programs [4, 22, 33], and MPI programs [40]; it has been extended with features for efficiently handling spinloops and blocking constructs [23], and been adapted for weak concurrency memory models, such as TSO and PSO [2,46]. DPOR has also been adapted for weak memory models by representing executions as graphs, where nodes represent read and write operations, and edges represent reads-from and coherence relations; this allows the algorithm to be parametric on a specific memory model, at the cost of calling a memory-model oracle [26, 28]

An important improvement has been the introduction of optimal DPOR algorithms, which are efficient in that they guarantee to explore exactly one execution from each equivalence class. The first optimal DPOR algorithm was designed for the sequence-based representation [1]. Subsequently, optimal DPOR algorithms for even weaker equivalences than Mazurkiewicz trace equivalence have been developed [5,8,9]. In some DPOR algorithms [1,8,9], optimality comes at the price of added memory consumption which in the worst case can be exponential in the size of the program. Even though most benchmarks in the literature show a modest memory overhead as the price for optimality, it would be desirable to have an optimal DPOR algorithm whose memory consumption is guaranteed to be polynomial in the size of the program [3]. Such an algorithm, called TruSt [27], was recently presented, but for a graph-based setting [28]. It would be desirable to develop a polynomial-space optimal DPOR algorithm also for sequence-based settings. One reason is that a majority of past work on DPOR is sequence-based; hence such an algorithm could be adapted to various programming models and features, some of which were recalled above. Another reason is that sequencebased models represent computations adhering to sequential consistency (SC) and TSO more naturally than graph-based models. For SC, representing executions as sequences of events makes executions consistent by construction and alleviates the need to resort to a potentially expensive SC oracle.

In this paper, we present the Parsimonious-OPtimal DPOR (POP) algorithm for analyzing multi-threaded programs under SC (Section 4). POP is designed

for programs in which threads interact by atomic reads, writes, and RMWs to shared variables, and combines several novel algorithmic techniques.

- A parsimonious race reversal technique (Section 4.1), which considers a race
 if and only if its reversal will generate a previously unexplored execution;
 in contrast, most existing DPOR algorithms reverse races indiscriminately,
 only to thereafter discard redundant reversals (e.g., by sleep sets or similar
 mechanisms).
- An eager race reversal strategy (Section 4.2), which immediately starts exploration of the new execution resulting from a race reversal; this prevents accumulation of a potentially exponential number of execution fragments generated by race reversals.
- In order to avoid exploring several executions in the same equivalence class, a naïve realization of POP would employ an adaptation of sleep sets [17]. However, these can in the worst case become exponentially large. Therefore, POP employs a parsimonious characterization of sleep sets (Section 4.3): instead of representing the elements of the sleep set, POP uses a characterization of them, which allows to detect and prevent redundant exploration, and uses at most polynomial space. This sleep set characterization is uniquely computed from its generating race, implying that explorations of different executions share no state, thereby making POP suitable for parallelization.

We prove (in the appendices of the longer version) that the POP algorithm is *correct* (explores at least one execution in each equivalence class), *optimal* (explores exactly one execution in each equivalence class), does not suffer from blocked explorations, and requires only polynomial size memory.

We have implemented POP DPOR in an extension of the Nidhugg tool [2]. Using a wide variety of benchmarks (Section 6), we show that POP's implementation indeed has its claimed properties, it always outperforms Optimal DPOR, and offers performance which is on par with TruSt, the state-of-the-art graph-based DPOR algorithm. Moreover, by being sequence-based, it scales much better than TruSt on programs with long executions.

2 Main Concepts

In this section, we informally present the core principles of our approach, in particular the three novel algorithmic techniques of parsimonious race reversal, eager race reversal, and parsimonious static representation of sleep sets, along with how they relate to previous sequence-based DPOR algorithms, on a simple example, shown in Fig. 1. In this code, four threads (p, q, r, s) access three shared variables (g, x, y, z), using five thread-local registers

Initially:
$$\mathbf{x} = \mathbf{y} = \mathbf{z} = 0$$

$$\begin{bmatrix}
p \\ \mathbf{x} = \mathbf{1} & q & r \\ \mathbf{y} = \mathbf{1} & g = \mathbf{1} \\ \mathbf{z} = \mathbf{1} & a = \mathbf{y} \\ b = \mathbf{x} & e = \mathbf{x}
\end{bmatrix}$$

Fig. 1. Program code

(a,b,c,d,e). 3 DPOR algorithms typically first explore an arbitrary execution,

³ Throughout this paper, we assume that threads are spawned by a main thread, and that all shared variables get initialized to 0, also by the main thread.

which is then inspected to detect races. Assume that the first execution is E_1 (the leftmost execution in Fig. 2). To detect races in an execution E, one first computes its happens-before order, denoted $\stackrel{\text{hb}}{\longrightarrow}_E$, which is the smallest transitive relation that orders two events that (i) are in the same thread, or (ii) access a common shared variable and at least one of them is a write. A race consists of two events in different threads that are adjacent in the $\stackrel{\text{hb}}{\longrightarrow}_E$ order. In execution E_1 there are two races on \mathbf{x} , two races on \mathbf{y} , and one race on \mathbf{z} . The two races on \mathbf{y} are marked with yellow arrows, as we are going to discuss them now. POP first reverses the race between events $\mathbf{y} = \mathbf{1}$ and $\mathbf{a} = \mathbf{y}$. For each race, a DPOR algorithm constructs an initial fragment of an alternative execution, called a schedule, which reverses the race and branches off from the explored execution just before the race. POP constructs a minimal schedule consisting of the events that happen before (in the $\stackrel{\text{hb}}{\longrightarrow}_{E_1}$ order) the second event followed by the second event of the race, while omitting the first event of the race, resulting in $(\mathbf{g} = \mathbf{1} \cdot \mathbf{a} = \mathbf{y})$, which is inserted as an alternative continuation after $\mathbf{x} = \mathbf{1}$ (the second branch after $\mathbf{x} = \mathbf{1}$).

In comparison, early DPOR algorithms, including the "classic" DPOR algorithm by Flanagan and Godefroid [16] and the Source DPOR algorithm of Abdulla $et\ al.$ [1] constructs the schedule consisting of just one event which can initiate an execution which reverses the race ($\langle g=1 \rangle$ in this case). Storing just one event saves space, but the execution afterwards is uncontrolled and may deviate from the path towards the second racing event a=y, potentially leading to redundant exploration. To avoid redundancy, we need sequence of events as schedules as Optimal DPOR and POP constructs.

 \diamond Eager Race Reversal Strategy: Following its the eager race reversal strategy, POP continues the exploration with this branch and explores E_2 . POP can in principle be implemented so that the schedules constructed as alternative continuations of an event are all collected before they are explored. However, such a strategy can in the worst case consume memory that is exponential in the program size. The reason is that for some programs, the number of schedules that branch off at a particular point in an execution may become exponential in the size of the program; this

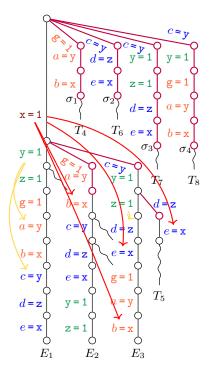


Fig. 2. Part of execution tree for the program in Fig. 1. Completed executions are denoted E_i ; truncated subtrees are denoted T_i .

was first observed by Abdulla *et al.* [3, Sect. 9]; an illustrating shared-variable program is given in [27, Sect. 2.3]. POP avoids this problem by *exploring sched-*

ules eagerly: immediately after the creation of a schedule, exploration switches to continuations of that schedule. This policy can be realized by an algorithm that calls a recursive function to initiate exploration of a new schedule. We establish, in Lemma 1, that the recursion depth of such an algorithm is at most n(n-1)/2, where n is the length longest execution of the analyzed program.

Continuing exploration, POP encounters the race on \mathbf{x} (red arrow) in E_2 involving events $\mathbf{x} = \mathbf{1}$ and $b = \mathbf{x}$. POP constucts the schedule $\sigma_1 := \langle \mathbf{g} = \mathbf{1} \cdot a = \mathbf{y} \cdot b = \mathbf{x} \rangle$ (second branch from the root) and explores the subsequent part of the tree T_4 (tree T_4 represents all the extensions after the schedule σ_1). After exploring the tree T_4 (second branch from the root), POP comes back to E_2 .

♦ Parsimonious Race reversal: To illustrate POP's mechanism for reversing each race only once, let us next consider races in execution E_2 . There is one race on y, between a = y and y = 1 in E_2 , for which POP would construct the schedule $\sigma :=$ $\langle c = y \cdot y = 1 \rangle$. However, a prefix of σ , namely $\langle c = y \rangle$, will be constructed from a race in E_1 between y = 1 and c = y and inserted as an alternative continuation after x=1 (the rightmost child of x=1 in Fig. 2). Thus, any continuation of σ after x = 1 can also be explored as a continuation after the rightmost child of x = 1, implying that inserting σ as an alternative continuation after x = 1 would lead to redundant exploration. POP avoids such redundant exploration by forbidding to consider races whose first event (in this case a = y) is in some schedule: reversing a race whose first event is in a schedule yields a fragment that is explored in some other execution. The execution E_2 also exhibits two races on x, both including x=1, with the events b=x and e=x. These races have already occurred in E_1 , and should therefore not be considered, since the schedules they would generate will be generated from the corresponding races in E_1 . POP achieves this by forbidding to consider races whose second event is not fresh. A second event of a race is fresh if it happens-after (in the \xrightarrow{hb} order) the last event of each schedule that appears between the two racing events. Returning to the two races on x in E_2 , their second events are not fresh, and hence they are not reversed.

Let us continue the exploration of E_2 in in Fig. 2 to illustrate how the eager race reversal strategy affects the order in which branches are explored. In E_2 , there are two more races, on y and z, whose reversals produce two branches after b=x and c=y, denoted by wavy edges. After their exploration, since there are no more races in E_2 , POP returns to E_1 , where the race between events y=1 and c=y induces the schedule $\langle c=y \rangle$, initiating exploration of E_3 . While exploring E_3 , the race inolving events z=1 and d=z in E_3 induces the schedule $\langle d=z \rangle$, initiating exploration of the subtree E_3 , during which the race on x involving E_3 and E_3 induces the schedule E_3 induces the schedule E_3 and E_3 induces the schedule E_3 induces the schedule E_3 induces the schedule E_3 induces the schedule E_3 induces the race involving events E_3 and E_3 induces the schedule E_3 in

♦ Parsimonious static representation of sleep sets: Even though the parsimonious race reversal strategy guarantees that the initial fragments of alternative

executions are inequivalent, one must prevent that their continuations become equivalent. This happens when POP continues after a read schedule, generated from a race whose second event is a read event. To illustrate this problem, let us consider the race involving events x=1 and b=x in E_3 , which produces the read schedule $\sigma_4 := \langle c = y \cdot y = 1 \cdot g = 1 \cdot a = y \cdot b = x \rangle$, initiating exploration of T_8 . Note that the schedule σ_4 is not conflicting with the read schedules σ_2 and σ_3 . At this point, we need to be careful: there is a danger that σ_4 will be continued using the other two schedules σ_2 , and σ_3 , whereas the explorations starting with schedules σ_2 , and σ_3 can be continued using σ_4 ; we would then explore equivalent executions, consisting of these three schedules in either order. The same problem occurs with σ_1 and σ_3 , as they do not conflict. The standard DPOR technique for avoiding such redundant exploration is sleep sets [17]. In its standard form, a sleep set is a set of events that should not be performed before some conflicting event. Since POP uses schedules as beginnings of alternative explorations, the appropriate adaptation would be to let a sleep set be a set of read schedules that should not be performed unless some conflicting event is performed before that. In Fig. 2, this would mean that after exploring the continuations of σ_2 and σ_3 , these schedules are added to the sleep set when starting to explore the continuations of σ_4 , and σ_1 is added to the sleep set when starting to explore the continuations of σ_3 . This mechanism is simple to combine with parsimonious race reversal and eager exploration of schedules. Unfortunately, there are programs where the number of read schedules that would be added to such a sleep set is exponential in the size of the program, whence the worst-case memory consumption may be exponential in the size of the program. POP avoids this problem by a Parsimonious static representation of sleep sets, which consumes memory that is polynomial in the size of the program. The idea is to totally order the read schedules. When continuing exploration after a read schedule σ , the read schedules that precede σ in this order are represented by POP's parsimonious static representation in polynomial space, even though the number of represented schedules may be exponential. In principle, there are several ways to order the read schedules. POP uses one such ordering, where σ_1 , σ_2 , σ_3 , and σ_4 would be the order. We provide the details about this representation in Section 4.3.

3 Programs, Executions, and Equivalence

We consider programs consisting of a finite set of *threads* that share a finite set of *(shared) variables*. Each thread has a finite set of local registers and runs a deterministic code, built in a standard way from expressions (over local registers) and atomic commands, using standard control flow constructs (sequential composition, selection, and bounded loop constructs). Atomic commands either write the value of an expression to a shared variable, or assign the value of a shared variable to a register, or can atomically both read and modify a shared variable. Conditional control flow constructs can branch on the value of an expression. From here on, we use t to range over threads, and x, y, z to range over shared variables. The local state of a thread is defined as usual by its program counter

and the contents of its registers. The global state of a program consists of the local state of each thread together with the valuation of the shared variables. The program has a unique initial state, in which shared variables have predefined initial values. We assume that memory is sequentially consistent.

The execution of a program statement is an *event*, which affects or is affected by the global state of the program. An event is represented by a tuple $\langle t, i, \mathsf{T}, x \rangle$, where t is the thread performing the event, i is a positive integer, denoting that the event results from the i-th execution step in thread t. T is the type of the event (either R for read or W for write and read-modify-write), and x is the accessed variable. If e is the event $\langle t, i, \mathsf{T}, x \rangle$, we write e.th for t, $e.\mathsf{T}$ for T , and e.var for x. An access is a pair $\langle \mathsf{T}, x \rangle$ consisting of a type and a variable. We write e.acc for $\langle e.\mathsf{T}, e.var \rangle$. We say that two accesses $\langle \mathsf{T}, x \rangle$ and $\langle \mathsf{T}', x' \rangle$ are dependent, denoted $\langle \mathsf{T}, x \rangle \bowtie \langle \mathsf{T}', x' \rangle$, if x = x' and at least one of T and T' is W . We say that two events e and e' are dependent, denoted $e \bowtie e$, if e.th = e'.th or $e.acc \bowtie e'.acc$. As is customary in DPOR algorithms, we can let an event represent the combined effect of a sequence of statements, if at most one of them accesses a shared variable.

An execution sequence (or just execution) E is a finite sequence of events, starting from the initial state of the program. We let enabled (E) denote the set of events that can be performed in the state to which E leads. An execution E is maximal if enabled $(E) = \emptyset$. We let dom(E) denote the set of events in E; we also write $e \in E$ to denote $e \in dom(E)$. We use u and w, possibly with superscripts, to range over sequences of events (not necessarily starting from the initial state), $\langle \rangle$ to denote the empty sequence, and $\langle e \rangle$ to denote the sequence with only the event e. We let $w \cdot w'$ denote the concatenation of sequences w and w', and let $w \setminus e$ denote the sequence w with the first occurrence of e (if any) removed. For a sequence $u = e_1 \cdot e_2 \cdot \ldots \cdot e_m$, we let $w \setminus u$ denote $(\cdots ((w \setminus e_1) \setminus e_2) \setminus \cdots) \setminus e_m$.

The basis for a DPOR algorithm is an equivalence relation on the set of execution sequences. The definition of this equivalence is based on a happens-before relation on the events of each execution sequence, which captures the data and control dependencies that must be respected by any equivalent execution.

Definition 1 (Happens-before). Given an execution sequence E, we define the happens-before relation on E, denoted \xrightarrow{hb}_E , as the smallest irreflexive partial order on dom(E) such that $e \xrightarrow{hb}_E e'$ if e occurs before e' in E, and $e \bowtie e'$.

The hb-trace (or trace for short) of E is the directed graph $(dom(E), \xrightarrow{hb}_{E})$.

Definition 2 (Equivalence). Two execution sequences E and E' are equivalent, denoted $E \simeq E'$, if they have the same hb-trace. We let $[E]_{\simeq}$ denote the equivalence class of E.

The equivalence relation \simeq partitions the set of execution sequences into equivalence classes, paving the way for an optimal DPOR algorithm which explores precisely one execution in each equivalence class.

4 Design of the POP Algorithm

In this section, we explain the design of POP, which is optimal in the sense that it explores precisely one execution in each equivalence class defined by Definition 2. We first need some auxiliary definitions

Definition 3 (Compatible sequences and happens-before prefix). For two execution sequences $E \cdot w$ and $E \cdot w'$,

- the sequences w and w' are called compatible, denoted $w \sim w'$, iff there are sequences w'' and w''' s.t. $E \cdot w \cdot w'' \simeq E \cdot w' \cdot w'''$,
- the sequence w is called a happens-before prefix of w', denoted $w \sqsubseteq w'$, iff there is a sequence w'' s.t. $E \cdot w \cdot w'' \simeq E \cdot w'$.

We illustrate the definition on the example in Fig. 2. Then $\sigma_4 \sqsubseteq E_3$ since $\langle \mathbf{x} = \mathbf{1} \rangle \cdot \sigma_4 \cdot w'' \simeq \langle \mathbf{x} = \mathbf{1} \rangle \cdot E_3$ where w'' is the sequence $\langle \mathbf{z} = \mathbf{1} \cdot d = \mathbf{z} \cdot e = \mathbf{x} \rangle$. However, $\sigma_1 \not\sim \sigma_4$, since σ_1 and σ_4 's second accesses to \mathbf{y} are in conflict.

Definition 4 (Schedule). A sequence of events σ is called a schedule if all its events happen-before its last one, i.e., $e' \xrightarrow{hb} e$ where e is its last event, and e' is any other event in σ . The last event e of a schedule σ is called the head of σ , sometimes denoted $hd(\sigma)$. We sometimes call σ a read schedule if $hd(\sigma)$ is a read event. For an execution sequence $E \cdot w$ and event $e \in w$, define the schedule $e \downarrow^w$ to be the subsequence e' of e' such that e' of e' and e' of e' iff $e' \xrightarrow{hb}_{E \cdot w} e$.

4.1 Parsimonious Race Reversals

A central mechanism of many DPOR algorithms is to detect and reverse races. Intuitively, a race is a conflict between two consecutive accesses to a shared variable, where at least one access writes to the variable (i.e., it is a write or a read-modify-write).

Definition 5 (Race). Let E be an execution sequence. Two events e and e' in E are racing in E if (i) e and e' are performed by different threads, (ii) $e \xrightarrow{hb}_{E} e'$. (iii) there is no other event e'' with $e \xrightarrow{hb}_{E} e'' \xrightarrow{hb}_{E} e'$.

Intuitively, a race arises when two different threads perform dependent accesses to a shared variable, which are adjacent in the $\stackrel{\text{hb}}{\longrightarrow}_E$ order. If e and e' are racing in E, then to reverse the race, E is decomposed as $E = E_1 \cdot e \cdot E_2$ with e' in E_2 , thereafter the schedule $\sigma = e' \downarrow^{E_2}$ is formed as the initial fragment of an alternative execution, which extends E_1 .

The key idea of parsimonious race reversal is to reverse a race *only if* such a reversal generates an execution that has not been explored before. To be able to do so, POP remembers whenever an event in a new execution is in a schedule, and whether it is a schedule head. This can be done, e.g., by marking events in schedules, and specifically marking the schedule head. From now on, we consider such markings to be included in the events of executions. They play an important role in selecting races.

Definition 6 (Fresh event). For an execution $E \cdot w \cdot e \cdot w'$, the event e is called fresh in $w \cdot e \cdot w'$ after E if (i) if e is in a schedule, then it is the head of that schedule, and (ii) for each head e_h of a schedule in w it is the case that $e_h \xrightarrow{hb}_{E \cdot w \cdot e} e$.

Definition 7 (Parsimonious race). Let E be an execution sequence. Two events e and e' in E are in a parsimonious race, denoted $e \lesssim_E e'$ if (i) e and e' are racing in E, (ii) e is not in a schedule in E, and (iii) e' is fresh in $w \cdot e'$ after E_1 , where $E = E_1 \cdot e \cdot w \cdot e' \cdot w'$

Conditions (ii) and (iii) are the additional conditions for a race to be parsimonious. They filter out races, whose reversals would lead to previously explored executions. Let us provide the intuition behind these conditions. (ii) If e is in a schedule, then that schedule, call it σ , was generated by a race in an earlier explored execution E'. Hence σ was contained in E'. Moreover e' would race with the head of σ also in E'; if e' appeared after σ the resulting new schedule had been generated already in E'; if e' appeared before σ , then we would only undo the previous race reversal. This is illustrated in Fig. 2 by the race on y, between a = y and y = 1 in E_2 . (iii) If e' is not fresh, then e' appeared with the same happens-before predecessors in an earlier explored execution E', where it was in a race that would generate the same schedule as in E. This is illustrated in Fig. 2 by the race on x, between b = x and e = x. in E_2 , which was already considered in E_1 .

4.2 The Parsimonious-OPtimal DPOR (POP) Algorithm

We will now describe the mechanism of the POP algorithm, without going into details regarding its handling of sleep sets (this will be done in Section 4.3). In particular, we will show how the eager race reversal strategy is represented in pseudo-code. Recall from Section 2 that a DPOR algorithm with parsimonious race reversal could be implemented so that the schedules that constructed from races with a particular event e are all collected before they are explored. However, for some programs, the number of schedules created from races with an event e can be exponential in the length of the longest program execution. In order not to consume exponential memory, POP explores schedules eagerly: immediately after the creation of a schedule, exploration switches to continuations of that schedule.

The POP algorithm is shown as Algorithm 1, where lines 1, 3 - 7, 13, and 16 are concerned with the exploration and race handling, and the other lines, which are marked with green background, are concerned with sleep sets. POP takes an input program, and explores its executions by repeated calls to the procedure Explore. For each prefix E' of an execution that is under exploration, the algorithm maintains a characterization SSChar[E'] of the sleep set at E', to be described in Section 4.3, in order to prevent redundant exploration of read schedules. This characterization is manipulated by POP through two functions:

MkSchedChar (σ, E_1, e, E_2) constructs a characterization of the sleep set for a newly constructed σ , constructed from a race $e \lesssim_{E_1 \cdot e \cdot E_2} \texttt{last}(E_2)$,

Algorithm 1: POP (Recursive)

```
1 Pick e \in \mathtt{enabled}(\langle \rangle)
_{2} SSChar[\langle \rangle] = SSChar[\langle e \rangle] = \emptyset
3 Explore(\langle e \rangle)
4 Explore(E)
        \mathbf{foreach}\ e\ s.t.\ e \lesssim_E e',\ where\ e' = \mathbf{last}\ (E)\ \mathbf{do}
             let E = E_1 \cdot e \cdot E_2
              let \sigma = e' \downarrow^{E_2}
             if UpdSeq(\sigma, SSChar[E_1]) \neq block then
                   SSChar[E_1 \cdot \sigma] = UpdSeq(\sigma, SSChar[E_1])
                   if (e'.T = R) then
10
                        SchedChar[E_1](\sigma) = MkSchedChar(\sigma, E_1, e, E_2)
11
                       SSChar[E_1 \cdot \sigma] \cup = SchedChar[E_1](\sigma)
12
                   Explore(E_1 \cdot \sigma)
13
        \textbf{if} \ \exists e \in \mathtt{enabled} \ (E) \ s.t. \ \ \underline{\mathtt{UpdSeq}}(\langle e \rangle, \mathit{SSChar}[E]) \neq \mathit{block} \ \mathbf{then}
14
              SSChar[E \cdot e] = UpdSeq(\langle e \rangle, SSChar[E])
15
              \texttt{Explore}(E \cdot e)
```

UpdSeq(w, SSChar) updates the sleep set characterization SSChar wrt. processing of the sequence w. However, if a characterized read schedule (i.e., a schedule in the sleep set) would be performed while exploring w, the function returns block instead of the updated characterization.

The algorithm first picks an enabled event e (line 1), initializes the characterizations of sleep sets of $\langle \rangle$ and $\langle e \rangle$ (line 2), whereafter it calls Explore($\langle e \rangle$) (line 3). Each call to Explore(E) consists of a race reversal phase (lines 5 to 13) and an exploration phase (lines 14 to 16). In the race reversal phase, POP considers all parsimonious races between an event e in E and the last event e' of E(line 5). For each such race, of form $e \lesssim_E e'$, POP decomposes E as $E_1 \cdot e \cdot E_2$ (line 6), and forms the schedule σ that reverses the race as $e' \downarrow^{E_2}$ (line 7). It then intends to call Explore $(E_1 \cdot \sigma)$ in order to recursively switch the exploration to the newly reversed race, according to the eager race reversal strategy. Before that it checks whether exploring $E_1 \cdot \sigma$ will complete a schedule in the sleep set by calling $UpdSeq(\sigma, SSChar[E_1])$ (line 8). If not, $SSChar[E_1 \cdot \sigma]$ is computed (line 9), and if e' is a read event also extended with the new sleep set for σ (lines 11 to 12). After these preparations, Explore $(E_1 \cdot \sigma)$ is called recursively (line 13). After the return of all recursive calls initiated in the race reversal phase, **Explore** enters the exploration phase. There it picks an event e that is enabled for execution, and check that e is not the head of a schedule in the sleep set by calling $UpdSeq(\langle e \rangle, SSChar[E])$ (line 14) If the check succeeds, exploration of e is prepared by updating $SSChar[E_1 \cdot e]$ (line 15) and then performed by calling Explore $(E \cdot e)$ (line 16).

We establish (in Lemma 1) that the recursion depth of Algorithm 1 is at most n(n-1)/2, where n is the length of the longest execution of the analyzed program.

4.3 Parsimonious Sleep Set Characterization

As described in Section 2, POP needs a sleep set mechanism to avoid redundant exploration of read schedules. Such a mechanism is needed whenever POP explores reversals of races with a write event e_W that appears after an execution E_1 . Then each parsimonious race $e_W \lesssim_{E'} e_R$ between e_W and a read event e_R results in a schedule σ , which will be explored as a continuation of E_1 . For any two such schedules, σ and σ' , POP must ensure that either the exploration starting with σ does not continue in a way that includes σ' , or (vice versa) that the exploration starting with σ' does not continue in a way that includes σ . In Section 2, it was further described that to achieve this, POP must for each such explored write event e_W establish a total order between the read schedules resulting from races with e_W , and ensure that an exploration starting with σ does not continue in a way that includes another schedule σ' which precedes σ in this order. It was also observed that, since there can be an exponential number of such schedules, the naïve approach of enumerating the schedules that precede σ can in the worst case consume space exponentical in the length of the longest execution.

In this section, we will describe one way to realize such a sleep set mechanism. We first define, for each explored write event e_W , a total order between the read-schedules resulting from races with e_W . Thereafter we define a succinct (polynomial-space) characterization of all schedules that precede any given such schedule σ . Finally, we define a polynomial-space mechanism for POP to monitor exploration so that exploration after the schedule σ does not explore another read schedule which precedes σ in the order.

First, for a variable x, we define a read-x-schedule to be a schedule whose head is a read on x, and which does not contain any other read or write on x. A read-schedule is a read-x-schedule for some variable x. Then a read-x-schedule is a schedule that may be formed when reversing a parsimonious race between a write on x and a read on x. Such a schedule σ cannot include a write on x, since then it could not have been formed from a race. Also, it cannot include a read on x, since that extra read will both happen-before $hd(\sigma)$, and happen-after the write on x, contradicting that there was a race between the write and $hd(\sigma)$.

Let us now define the order \propto , which for each write event e_W totally orders the schedules that result from parsimonious races between e_W and a subsequent read. Let σ be formed from a race $e_W \lesssim_E e_R$ between e_W and another read event e_R in E and σ' be formed from a race $e_W \lesssim_{E'} e_R'$ between e_W and another read event e_R' . Then $\sigma' \propto \sigma$ if either

- (A) E' is a prefix of E, i.e., e'_R occurs before e_R in E, or
- (B) for the longest common prefix \hat{E} of E and E', E has a prefix of form $\hat{E} \cdot \hat{e}$ for some non-schedule event \hat{e} , whereas E' has a prefix of form $\hat{E} \cdot \hat{\sigma}$ for some schedule $\hat{\sigma}$ (which is induced by a race whose first event is \hat{e}), or
- (C) for the longest common prefix \hat{E} of \hat{E} and E', E has a prefix of form $\hat{E} \cdot \sigma_i$ for some schedule σ_i , whereas E' has a prefix of form $\hat{E} \cdot \sigma_i'$ for some schedule σ_i' , and $\sigma_i' \propto \sigma_i$.

Schedules of form (A) are called *contained schedules* (wrt. σ). An example can be found in Fig. 2. Consider the schedules $\sigma_3 := \langle c = y \cdot y = 1 \cdot z = 1 \cdot d = z \cdot e = x \rangle$

from the race $x = 1 \lesssim_{E_3} e = x$ in E_3 , and $\sigma_4 := \langle e = y \cdot y = 1 \cdot g = 1 \cdot a = y \cdot b = x \rangle$ from the race $x = 1 \lesssim_{E_3} b = x$ in E_3 . As e = x occurs before b = x in E_3 , (A) implies that $\sigma_3 \propto \sigma_4$. Schedules of form (B) are called *conflicting schedules*, beacuse e' occurs in an execution which branches off from (thus conflicts with) E because of a race involving an event \hat{e} in E. For example, consider the schedules $\sigma_2 := \langle c = y \rangle$ $d = \mathbf{z} \cdot e = \mathbf{x}$, which is constructed from the race between $\mathbf{x} = \mathbf{1}$ and $e = \mathbf{x}$ in T_5 , and σ_4 constructed from the race $\mathbf{x} = \mathbf{1} \lesssim_{E_3} \mathbf{b} = \mathbf{x}$ in E_3 . Since T_5 branches off from (and thus conflicts with) E_3 after the prefix $\hat{E} := \langle \mathbf{x} = \mathbf{1} \cdot c = \mathbf{y} \cdot \mathbf{y} = \mathbf{1} \rangle$ with the schedule $\hat{\sigma} := \langle d = \mathbf{z} \rangle$, we have $\sigma_2 \propto \sigma_4$ according to case (B). Schedules of form (C) are called *inherited schedules*, because the order $\sigma' \propto \sigma$ is inherited from the order $\sigma'_i \propto \sigma_i$. For example, consider the schedules $\langle g = 1 \cdot a = y \rangle$ (second branch after x = 1), and $\langle c = y \rangle$ (third branch after x = 1), for which $\langle g = 1 \cdot a = y \rangle \propto \langle c = y \rangle$ because of (A). Now consider the schedules $\sigma_1 := \langle g = 1 \cdot a = y \cdot b = x \rangle$ from the race $x = 1 \lesssim_{E_2} b = x$ in E_2 , and σ_3 from the race $x = 1 \lesssim_{E_3} e = x$ in T_4 . As $\langle g = 1 \cdot a = y \rangle$ is a prefix of σ_1 and $\langle c = y \rangle$ is a prefix of σ_3 , according to (C), the order $\langle g = 1 \cdot a = y \rangle$ $\propto \langle c = y \rangle$ is inherited as $\sigma_1 \propto \sigma_3$.

It is clear that these rules define a total order on the read schedules that branch off after E_1 . Let us next define a succinct way to characterize, for a given schedule σ , the set of schedules σ' such that $\sigma' \propto \sigma$. Given $E = E_1 \cdot e_W \cdot w \cdot e_R$ and σ formed from the race $e_W \lesssim_E e_R$, let $w = w_0 \cdot \sigma_1 \cdot w_1 \cdot \sigma_2 \cdot \cdots \cdot \sigma_m \cdot w_m$, where $\sigma_1, \ldots, \sigma_m$ are the schedules in w. We note that σ , in order for $e_W \lesssim_E e_R$ to be parsimonious, includes all σ_i (including their heads) for $1 \leq i \leq m$, and may also include events in the sequences w_0, \ldots, w_m . This means that $w \setminus \sigma$ will be of form $w'_0 \cdot \ldots \cdot w'_m$, where w'_i is the sequence remaining in w_i after removing σ ; in particular $w \setminus \sigma$ does not contain any events in any schedule σ_i . The following proposition characterizes how to detect a schedule σ' with $\sigma' \propto \sigma$ in an exploration that is initiated from $E_1 \cdot \sigma$.

Proposition 1. Let $E = E_1 \cdot e_W \cdot w \cdot e_R$, let $w = w_0 \cdot \sigma_1 \cdot w_1 \cdot \cdots \cdot w_m$, and let σ be formed from $e_W \lesssim_E e_R$. Let $w'_j = w_j \setminus \sigma$ for $j = 0, \ldots, m$, and $e_j = hd(\sigma_j)$ for $j = 1, \ldots, m$. Let $E_1 \cdot \sigma \cdot u \cdot e'_R$ be an execution where e'_R is a read event on x, and let $\sigma' = e'_R \downarrow^{\sigma \cdot u \cdot e'_R}$. Then $\sigma' \propto \sigma$ iff σ' is a read-x-schedule such that either

```
(A) \ \ (i) \ (e'_R \downarrow^{u \cdot e'_R}) \sqsubseteq w \setminus \sigma, \ and \ (ii) \ if \ e'_R \ is \ in \ w'_j \ then \ e_k \xrightarrow{\text{hb}} e'_R \ for \ 1 \leq k \leq j,
```

(B) for some
$$j$$
 with $0 \le j \le i$ we have (i) $(e'_R \downarrow^{u \cdot e'_R}) \not\sim w'_0 \cdot \ldots \cdot w'_j$, and

(ii) if j is the smallest index s.t. (i) holds, then
$$e_k \xrightarrow{hb} e'_R$$
 for $1 \le k \le j$, or

(C) for some i with $1 \le i \le m$ s.t. σ_i is a read-schedule, and σ'_i with $\sigma'_i \propto \sigma_i$

1) if
$$hd(\sigma_i) .var \neq x$$
 then (i) $(hd(\sigma_i') \downarrow^{w_0' \cdot \dots \cdot w_i' \cdot \sigma_i'}) \sqsubseteq u$,

(ii) $hd(\sigma_i') \overset{\text{hb}}{\rightleftharpoons} e'$ and (iii) $e : \overset{\text{hb}}{\rightleftharpoons} e'$ for $1 \leq k \leq i$

 $\begin{array}{l} (ii) \ hd \ (\sigma_i') \xrightarrow{\text{hb}} e_R', \ and \ (iii) \ e_k \xrightarrow{\text{hb}} e_R' \ for \ 1 \leq k \leq i. \\ 2) \ if \ hd \ (\sigma_i) \ .var = x \ then \ (i) \ (hd \ (\sigma_i') \ \downarrow^{w_0' \cdot \dots \cdot w_i' \cdot \sigma_i'}) \sqsubseteq u \cdot e_R', \end{array}$

(ii)
$$hd(\sigma'_i) = e'_R$$
, and (iii) $e_k \xrightarrow{hb} e'_R$ for $1 \le k \le i$.

Let us motivate this proposition.

(A) Since $\sigma \sqsubseteq w \cdot e_R$, condition (i) implies that $\sigma' = e'_R \downarrow^{\sigma \cdot u \cdot e'_R} \sqsubseteq w$, implying that σ' is a contained schedule (wrt. σ).

- (B) Since $\sigma \sqsubseteq w \cdot e_R$, condition (i) implies that $\sigma' = e'_R \downarrow^{\sigma \cdot u \cdot e'_R} \not\sim w_0 \cdot \sigma_1 \cdot \ldots \cdot \sigma_j \cdot w_j$, implying that σ' is a conflicting schedule.
- (C) Let us first consider case 1). Since $\sigma \sqsubseteq w \cdot e_R$, condition (i) implies that $(hd(\sigma'_i) \downarrow^{w_0 \cdot \sigma_1 \cdot \dots \cdot \sigma_j \cdot w_j \cdot \sigma'_i}) \sqsubseteq \sigma \cdot u$, implying that σ' is an inherited schedule. Condition (ii) ensures that e'_R appears in the exploration that follows, in which case $hd(\sigma'_i) \xrightarrow{hb} e'_R$ is necessary for e'_R to be fresh. Case 2) is a slight modification for these case that the head of σ'_i and e'_R read from the same variable, in which case e'_R must be $hd(\sigma'_i)$ (since a read-x-schedule cannot contain another read on x).

In each case, the last condition ensures that e'_R is fresh, and thus part of a parsimonious race.

Let us illustrate, using Fig. 2, how some continuations of read schedules can be characterized according to Proposition 1. First, consider σ_4 (top right in Fig. 2), derived from the race $\mathbf{x} = \mathbf{1} \lesssim_{E_3} b = \mathbf{x}$ in E_3 . Fig. 2. Decomposing E_3 as $\mathbf{x} = \mathbf{1} \cdot w \cdot b = \mathbf{x}$, where $w := \langle c = \mathbf{y} \cdot \mathbf{y} = \mathbf{1} \cdot \mathbf{z} = \mathbf{1} \cdot d = \mathbf{z} \cdot e = \mathbf{x} \cdot \mathbf{g} = \mathbf{1} \cdot a = \mathbf{y} \rangle$ we obtain $w \setminus \sigma_4 = \langle \mathbf{z} = \mathbf{1} \cdot d = \mathbf{z} \cdot e = \mathbf{x} \rangle$.

- (A) Assume that the exploration continues after σ_4 as $\langle z = 1 \cdot d = z \cdot e = x \rangle$. Letting u be $\langle z = 1 \cdot d = z \rangle$ and e'_R be e = x, we see that $\sigma' = u \cdot e'_R$ matches the conditions in case (A), since (i) $\sigma' \sqsubseteq w \setminus \sigma_4$ and (ii) e'_R happens-after the head of the only schedule $\langle c = y \rangle$ from E_3 .
- (B) Assume next that the exploration continues after σ_4 as $\langle d = \mathbf{z} \cdot e = \mathbf{x} \rangle$. Letting u be $\langle d = \mathbf{z} \rangle$ and e'_R be $e = \mathbf{x}$, we see that $\sigma' = u \cdot e'_R$ matches the conditions in case (B), since (i) $e = \mathbf{x} \downarrow^{\langle d = \mathbf{z} \cdot e = \mathbf{x} \rangle} = \langle d = \mathbf{z} \cdot e = \mathbf{x} \rangle$ and $\langle d = \mathbf{z} \cdot e = \mathbf{x} \rangle \not\sim (w \setminus \sigma)$, and (ii) $e = \mathbf{x}$ happens-after the head of the only schedule $c = \mathbf{y}$ from E_3 .

Based on Proposition 1, we now describe a technique to monitor the exploration of executions in order to detect when it is about to explore a schedule in a sleep set. It is based on annotating each newly constructed read schedule σ with a characterization of the schedules σ' with $\sigma' \propto \sigma$ that must be avoided in the exploration that continues after σ . We use the same notation and set-up as for Proposition 1. For $i=0,\ldots,m$, let P_i denote $P_i=w_0'\{e_1\}w_1'\cdots\{e_i\}w_i'$, where w_j' is $w_j\backslash\sigma$ for $j=0,\ldots,i$, and e_j is $hd(\sigma_j)$ for $j=1,\ldots,i$. From Proposition 1 we see that (i) P_m and x contains sufficient information to characterize the contained and conflicting schedules that must be avoided, and (ii) for each $i=1,\ldots,m$, such that σ_i is a read-schedule, P_{i-1} together with a characterization of the schedules that must be avoided after $E_1 \cdot w_0 \cdot \sigma_1 \cdot \ldots \cdot \sigma_{i-i} \cdot w_{i-1} \cdot \sigma_i$ contain sufficient information

to characterize the schedules inherited from schedules σ'_i with $\sigma'_i \propto \sigma_i$ that must be avoided. Let us therefore define a schedule expression as an expression of form (i) $P_m \triangleright x$, characterizing the set of contained and conflicting read-x-schedules, according to cases (A) and (B) in Proposition 1, or of form (ii) $P_{i-1}[\varphi_i] \triangleright x$ for some i = 1, ..., m, such that σ_i is a read-schedule, and φ_i is a schedule expression characterizing schedules that should be avoided after $E_1 \cdot w_0 \cdot \sigma_1 \cdot \ldots \cdot \sigma_{i-i} \cdot w_{i-1} \cdot \sigma_i$ (i.e., those σ'_i with $\sigma'_i \propto \sigma_i$). Let's go through one example of each form of schedule expressions in Fig. 2. When POP explore a continuation of σ_4 , the algorithm creates an inital sleep set expression $SchedExp[\langle \rangle](\sigma_2)$ containing two expressions; (i) $P_m > x = \{c = y\} \langle y = 1 \cdot z = 1 \cdot d = z \cdot e = x \cdot a = y \rangle > x$ representing only two sequences σ_2 and σ_3 , and (ii) $P_{i-1}[\varphi_i] \triangleright x = \langle \rangle [\langle z = 1 \cdot a = y \cdot b = x \rangle \triangleright y] \triangleright x$, representing only σ_1 . Notice that, expression (ii) is useless in this case as σ_1 is conflicting with σ_4 , i.e., σ_1 is not a feasible continuation after σ_4 . However, when POP explores a continuation of σ_2 an inital sleep set expression $SchedExp[\langle \rangle](\sigma_2)$ containing the expression $P_{i-1}[\varphi_i] \triangleright x = \langle \rangle [\langle z = 1 \cdot a = y \cdot b = x \rangle \triangleright y] \triangleright x$, representing only σ_1 , which will prevent doing σ_1 .

In order to detect when exploration is about to explore a schedule that must be avoided, the "state" of each schedule expression will during exploration be maintained by POP in a sleep set expression, which is obtained from a schedule expression φ by (i) augmenting each event e which occurs in some sequence w_i in φ (i.e., not inside brackets $\{\cdot\}$) with a conflict set (denoted C) of encountered events that conflict with e or happen-after an event that conflicts with e; we use the notation e^C to denote such an augmented event, (ii) augmenting each enclosed subexpression of form $P \triangleright x$ or $P[\varphi] \triangleright x$ with the set (denoted D) of encountered read-x-events that are heads of read-schedules that are characterized by $P \triangleright x$; we use the notation $[P \triangleright x]^D$, and (iii) augmenting each occurring variable x in a subexpression of form $\triangleright x$ with the set of previously encountered read events on x; we use the notation $\triangleright x^R$, where R is this set of read events. If a read on x happens-after an read in R, it cannot be the head of a read-x-schedule, and should thus not be blocked (recall from the definition of read-x-schedules that its head cannot happen-after another read on the same variable). When a sleep set expression is created and initialized, its augmenting sets are empty. We identify a schedule expression with its initialized sleep set expression.

Let's see POP's implementation of the functions $MkSchedChar(\sigma, E_1, e, E_2)$ and UpdSeq(w, SSChar), which are called by Algorithm 1 to manipulating sleep set expressions. The function $MkSchedChar(\sigma, E_1, e, E_2)$ (line 1), constructs the set of schedule expressions for σ according to the description given earlier in this section. The function UpdSeq(w, SSChar) updates the sleep set characterization SSChar wrt. processing of the sequence w. At its top level, UpdSeq(w, SSChar) updates each sleep set expression ψ in SSChar with the sequence of events in w, one by one, each time calling $UpdSe(e, \psi)$. If e is a write on a variable y, then in this process, all sleep set expressions containing $\triangleright y$ are discarded, since it is from now in impossible to form a read-y-schedule. $UpdSe(e, \psi)$ comes in two versions (at line 11 and line 14). Both versions first call UpdP(e, P, x, R), which updates the sleep set expressions with respect to contained and conflicting read-x-schedules

Algorithm 2: Functions for Parsimonious Sleep Set Characterization

```
1 MkSchedChar(\sigma, E_1, e, E_2)
        let x = hd(\sigma).var
 2
        let E_2 = w_0 \cdot \sigma_1 \cdot w_1 \cdot \cdots \cdot \sigma_m \cdot w_m \cdot e'
        for i = 0, ..., m let P_i = (w_0 \setminus \sigma) \{ hd(\sigma_1) \} (w_1 \setminus \sigma) \cdots \{ hd(\sigma_i) \} (w_i \setminus \sigma)
        for i = 0, ..., m let u_i = e \cdot w_0 \cdot \sigma_1 \cdot ... \cdot \sigma_i \cdot w_i
       \mathtt{return}\left(\{P_m\rhd x\}\cup\bigcup_{i=1}^m\{P_{i-1}[\varphi_i]\rhd x\mid \varphi_i\in SchedChar[E_1\cdot u_{i-1}](\sigma_i)\}\right)
 7 UpdSeq(w, SSChar)
        if w = \langle \rangle then return (SSChar)
        else if \exists \psi \in SSChar : UpdSE(fst(w), \psi) = block then return block
10
        else return (UpdSeq(rest(w), \{UpdSE(fst(w), \psi) | \psi \in SSChar \land \})
         if e.T = W then \psi does not contain \triangleright (e.var)
11 UpdSE(e, P \triangleright x^R)
        if UpdP(e, P, x, R) = block then return block
12
        else return (UpdP(e, P, x, R) \triangleright x)
   \operatorname{UpdSE}(e, P[\psi']^D \rhd x^R)
        if UpdP(e, P, x, R) = block then return block
15
        if UpdP(e, P, x, R) = none then
16
            if (e.T = R \land e.var = x \land (e \in D \lor \exists e' \in D : [e'.var \neq x \land e' \xrightarrow{hb} e]) then
17
                if \not\exists e'_R \in R : e'_R \xrightarrow{hb} e then return block else add e to R
18
            else
19
                 if \mathrm{UpdSE}(e, \psi') = block then return (P[\psi']^{D \cup \{e\}} \rhd x)
20
                else return (P[UpdSE(e, \psi')] \triangleright x)
21
        else return (UpdP(e, P, x)[\psi']^D \triangleright x)
22
   UpdP(e, P, x, R)
23
        let P = w'_0\{e'_1\}w'_1 \cdots \{e'_i\}w'_i
24
        for j=0,\ldots,i do
25
            let w'_j = e_1^{C_1} \cdot \ldots \cdot e_k^{C_k}
for l = 1, \ldots, k do
27
                 if e \bowtie C_l \lor e \leftrightarrow e_l then add e to C_l; go to line 31
28
                if e = e_l then remove e from w'_i; go to line 31
29
        return none
        if (e.T = R \land e.var = x \land \forall n : 1 \le n \le j : e'_n \xrightarrow{hb} e) then
31
          if \not\exists e'_R \in R : e'_R \xrightarrow{hb} e then return block else add e to R
32
        else return the updated version of P
33
```

characterized by $P \rhd x^R$. If e is the head of such a schedule, then $\mathsf{UpdP}(e,P,x,R)$ returns block; if e is independent with all of P, then $\mathsf{UpdP}(e,P,x,R)$ returns indep; otherwise it returns the updated version of P. In the code for UpdP , we let let $e \leftrightarrow e'$ denote that e and e' are performed by different threads and access the same variable and at least one of e and e' writes. Let $e \bowtie e'$ denote that e and e' are performed by the same thread, or that they access the same variable and at least one of e and e' writes. For an event e and a set C of events, let $e \bowtie C$ denote

that there is some $e' \in C$ with $e \bowtie e'$. When called, $\operatorname{UpdP}(e, P, x, R)$ traverses the sequences w'_0, \ldots, w'_i , one event at a time, and stop at the first event $e_l^{C_l}$ such that either (i) e conflicts with e_l or depends with an event in C_l , in which case e is added to C_l (line 28), or (ii) $e = e_l$, in which case e is removed from the sequence (of form w'_j) (line 29). If in addition e is a read on e and happens after the relevant schedule heads among e'_1, \ldots, e'_i for being fresh, then if e does not happen after a read in e, $\operatorname{UpdP}(e, P, x, R)$ returns blocked (since in case (i) it is the head of a conflicting schedule and in case (ii) of a contained schedule), else e is added to e (line 32). If on the other hand, e is not a read on e or does not happen after the relevant schedule heads among e'_1, \ldots, e'_i , then $\operatorname{UpdP}(e, P, x, R)$ returns the updated version of e. Finally, if there is no event $e^{C_l}_i$ in e'_1, \ldots, e'_l satisfying conditions (i) or (ii), then e updepended returns e line 30).

Let us now consider $\operatorname{UpdSE}(e,\psi)$, which comes in two versions, depending on the form of ψ . If ψ is of form $P \rhd x^R$ (line 11), it calls $\operatorname{UpdP}(e,P,x,R)$ and forwards its return value. If ψ is of form $P[\psi']^D \rhd x^R$) (line 14), it also calls $\operatorname{UpdP}(e,P,x,R)$. Also this version forwards the return value block. In addition, if $\operatorname{UpdP}(e,P,x,R)$ returns none, meaning that the execution has reached past the prefix P, then (i) if some event already in D (being the head of an schedule characterized by ψ' , happens-before e (or is the same as e if it reads from x), and e is a read on x, then if e does not happen after a read in R, the function returns blocked (since e is the head of an inherited schedule), else e is added to R (line 18), (ii) otherwise, processing is continued recursively on ψ' by calling $\operatorname{UpdSE}(e,\psi')$. If this call returns blocked, then e is added to D (line 20), otherwise the inner sleep set expression ψ' is updated. Finally, if $\operatorname{UpdP}(e,P,x,R)$ returns neither blocked nor none, the updated sleep set expression is returned.

5 Correctness and Space Complexity

In this section, we state theorems of correctness, optimality, and space complexity of POP. We first consider correctness and optimality.

Theorem 1. For a terminating program P, the POP algorithm has the properties that (i) for each maximal execution E of P, it explores some execution E' with $E' \simeq E$, and (ii) it never explores two different but equivalent maximal executions, and (iii) it is never blocked (at line 14) unless it has explored a maximal execution.

We thereafter consider space complexity.

Lemma 1. The number of nested recursive calls to Explore at line 13 is at most n(n-1)/2, where n is the length of the longest execution of the program.

Note that in this lemma, we do not count the calls at line 16, since they are considered as normal exploration of some execution. Only the calls at line 13 start the exploration of a new execution.

Theorem 2. Algorithm 1 needs space which is polynomial in n, where n is the length of the longest execution of the analyzed program.

6 Implementation and Evaluation

Our implementation was done in a fork of the Nidhugg tool. Nidhugg is a state-of-the-art stateless model checker for C/C++ programs with Pthreads, which works at the level of LLVM Intermediate Representation, typically produced by the Clang compiler. Nidhugg comes with a selection of DPOR algorithms, one of which is Optimal DPOR [1] nowadays also enhanced with Partial Loop Purity elimination and support for await statements [23]. In our Nidhugg fork, we have added the POP algorithm as another selection. Its iterative implementation involved: (i) designing an efficient data structure to simulate recursive calls to Explore, i.e., follow the next schedule to explore and backtrack to the previous execution when no further races to reverse; and (ii) developing a procedure that filters out races that are not parsimonious races, and implementing it with the necessary data structures to store and maintain the parsimonious sleep sets.

In the rest of this section, we evaluate the performance of POP's implementation and compare it, in terms of time and memory, against the implementation of Optimal DPOR in Nidhugg commit 5805d77 and the graph-based Truly Stateless (TruSt) Optimal DPOR algorithm [27] as implemented in GenMC v0.10.0 using options -sc --disable-instruction-caching. All tools employed LLVM 14.0.6. The evaluation was conducted on a desktop with a Ryzen 7950X CPU running Debian 12.4.

Table 1 contains the results of our evaluation. Its first nine benchmarks are from the DPOR literature, and are all parametric on the number of threads (shown in parentheses). The last benchmark, length-param, is synthetic and is additionally parametric on the length of its executions. Since these DPOR algorithms are optimal, they explore the same number of executions (2nd column) in all ten benchmarks. We will analyze the results in five groups (cf. Table 1).

The first group consists of three programs (circular-buffer from SCTBench [45], fib-bench from SV-Comp [43], and the linuxrwlocks from SATCheck [14]). Here, all algorithms consume memory that stays constant as the size of the program and the number of executions explored increase. We can therefore compare the raw performance of the implementation of these three DPOR algorithms. POP's implementation is fastest on circular-buffer, while TruSt's is fastest on the two other programs. However, notice that all three implementations scale similarly.

The second group consists of the two benchmarks (filesystem and indexer) from the "classic" DPOR paper of Flanagan and Godefroid [16]. Here, Optimal DPOR shows an increase in memory consumption (measured in MB), while the other two algorithms use constant memory. POP is fastest here by approximately 2×.

The third group, consisting of lastzero [1] and exp-mem3,⁵ two synthetic benchmarks also used in the TruSt paper [27, Table 1], shows a similar picture

 $^{^4}$ The code is publicly available on GitHub in simplified-dpor branch of a Nidhugg's fork (https://github.com/sarbojit4/nidhugg). We also submitted our implementation as well as the benchmarking infrastructure we have used as an artifact (https://doi.org/10.5281/zenodo.11001033).

⁵ exp-mem3 is slight variant of the exp-mem program used in the TruSt paper. It uses atomic stores and loads instead of fetch-and-adds (FAAs), because the current

Table 1. Time and memory performance of three optimal DPOR algorithms on ten benchmark programs which are parametric in the number of threads used.

		Time (secs)			Memory (MB)		
Benchmark	Executions	TruSt	Optimal	POP	TruSt	Optimal	POP
circular-buffer(7)	3432	0.62	0.45	0.43	85	84	84
circular-buffer(8)	12870	2.63	1.79	1.66	85	84	84
circular-buffer(9)	48620	11.04	7.21	6.67	85	84	84
fib-bench(4)	19605	1.08	1.93	1.82	85	84	84
fib-bench(5)	218243	14.59	24.66	24.10	85	84	84
fib-bench(6)	2364418	186.25	301.30	297.40	85	84	84
linuxrwlocks(6)	99442	3.61	13.71	12.88	90	91	91
linuxrwlocks(7)	829168	32.75	127.66	121.17	90	91	91
linuxrwlocks(8)	6984234	311.93	1176.13	1119.23	90	91	91
filesystem(22)	512	0.72	0.62	0.34	86	84	84
filesystem(24)	2048	2.84	2.97	1.32	86	187	84
filesystem(26)	8192	11.88	15.71	5.66	85	622	84
indexer(15)	4096	11.07	8.58	5.65	89	116	90
indexer(16)	32768	90.14	80.37	46.46	89	464	90
indexer(17)	262144	736.78	827.02	399.87	89	3030	90
lastzero(10)	3328	0.07	0.34	0.27	85	84	84
lastzero(15)	147456	3.19	24.46	15.09	85	276	84
lastzero(20)	6029312	152.13	1828.92	786.19	85	8883	84
exp-mem3(7)	10080	0.22	0.67	0.54	86	104	85
exp-mem3(8)	80640	1.96	6.15	4.61	86	506	85
exp-mem3(9)	725760	19.11	73.68	44.83	86	4489	85
dispatcher(4)	6854	1.15	1.75	1.47	90	90	90
dispatcher(5)	151032	34.66	55.07	42.76	89	407	90
dispatcher(6)	4057388	1245.13	2333.51	1424.57	89	9097	90
poke(10)	135944	88.54	96.30	63.45	90	791	90
poke(15)	728559	874.76	891.26	479.03	89	5527	90
poke(20)	2366924	4502.45	4356.59	2008.92	90	22383	90
length-param(2,1024)	4	0.14	0.05	0.06	85	84	84
length-param(2,8196)	4	7.95	0.16	0.14	95	101	89
length-param $(2,65536)$	4	1413.00	1.13	0.90	389	441	343

in terms of memory consumption: Optimal DPOR's increases more noticeably here, while the two other algorithms use memory that stays constant. Time-wise, TruSt is $2-5\times$ faster than POP, which in turn is $2\times$ faster than Optimal.

The fourth group, consisting of two concurrent data structure programs (dispatcher and poke) from the Quasi-Optimal POR paper [38], shows Optimal's memory explosion more profoundly, and provides further evidence of the good memory performance of the TruSt and POP algorithms. Time-wise, there is no clear winner here, with TruSt's implementation being a bit faster on dispatcher, and with POP's being faster and scaling slightly better than TruSt's on poke.

Finally, let us examine the algorithms' performance on length-param(T,N), a synthetic but simple program in which a number of threads (just two here) issue N stores and loads to thread-specific global variables, followed by a store and a load to a variable shared between threads. The total number of executions is just four here, but the executions grow in length. One can clearly see the superior time

implementation of Optimal DPOR (and POP) in Nidhugg employs an optimization which treats independent FAAs as non-conflicting [23] and explores only one trace on the exp-mem program independently of the benchmark's parameter.

performance of sequence-based DPOR algorithms, such as Optimal and POP, compared to graph-based algorithms such as TruSt. We can also notice that POP performs slightly better than Optimal in terms of memory.

We mention in passing that we also conducted an experiment in which we used the implementation of POP to check, under the SC memory model, the code of Linux kernel's Hierarchical Read-Copy Update (Tree RCU) implementation [30]. Both Optimal DPOR and POP performed similarly: on our desktop, the experiment finished in about five minutes, exploring a bit over 42 000 executions, and with very low (90MB) memory requirements. Since GenMC cannot handle RCU's code, we do not include these results in the table, but we offer it as further evidence about POP's implementation being able to handle "real code" out there.

Wrapping up our evaluation, we can make the following two general claims:

- 1. Both POP and TruSt live up to their promise about performing SMC exploration which is optimal (w.r.t. the Mazurkiewicz equivalence) but also with polynomial (in fact, in practice, constant) space consumption.
- 2. The implementation of the POP algorithm consistently outperforms that of Optimal DPOR in Nidhugg. This is mostly due to increased simplicity.

7 Related Work

Since its introduction in the tools Verisoft [18,19] and CHESS [37], stateless model checking has been an important technique for analyzing correctness of concurrent programs. Dynamic partial order reduction [16,42] has enabled a significantly increased efficiency for covering all interleavings, which has been adapted to many different settings and computational models, including actor programs [44], abstract computational models [25], event driven programs [4,22,33], and MPI programs [40]. DPOR has been adapted for weak memory models including TSO [2,14,46], Release-Acquire [7], POWER [6], and C11 [26], and also been applied to real life programs [30]. DPOR has been extended with features for efficiently handling spinloops and blocking constructs [23,29],

An important advancement has been the introduction of optimal DPOR algorithms, which guarantee to explore exactly one execution from each equivalence class [1], and therefore achieve exponential-time reduction over non-optimal algorithms. This saving came at the cost of worst-case exponential (in the size of the program) memory consumption [3]. The strive for covering the space of all interleavings with fewer representative executions inspired DPOR algorithms for even weaker equivalences than Mazurkiewicz trace equivalence, such as based on observers [9], reads-from equivalence [5,11,12], context-sensitive independence and observers [8], or on the maximal causal model [21]. These approaches explore fewer traces than approaches based on Mazurkiewicz trace equivalence at the cost of potentially expensive (often NP-hard) consistency checks. Another line of work uses unfoldings [35] to further reduce the number of interleavings that must be considered [24, 38, 41]; these techniques incur significantly larger cost per test execution than the previously mentioned ones.

DPOR has also been adapted for weak memory models using an approach in which executions are represented as graphs, where nodes represent read and write operations, and edges represent reads-from and coherence relations; this allows the algorithm to be parametric on a specific memory model, at the cost of calling a memory-model oracle [26, 28, 31]. For this graph-based setting, an optimal DPOR algorithm with worst-case polynomial space consumption, called TruSt, was recently presented [27]. POP is also optimal with worst-case polynomial space consumption. Since it is designed for a sequence-based representation of executions, POP must be designed differently. In analogy with the parsimonious race reversal technique, TruSt has a technique for reversing each race only once, which is based on a maximal extension criterion. POP adapts TruSt's strategy of eager race reversal to avoid potentially space-consuming accumulation of schedules. Finally, since TruSt operates in a graph-based setting, it reverses write-read races by changing the source of a read-from relation in the graph, instead of constructing a new schedule. Therefore redundant exploration of readschedules is prevented by careful book-keeping instead of using sleep sets, which POP represents in a compact parsimonious way. The experimental results show that TruSt and POP have comparable performance for small and modest-size programs, but that POP is superior for programs with long executions, since the graph-based approach has difficulties to scale for long executions.

An alternative to DPOR for limiting the number of explored executions is to cover only a subset of all executions. Various heuristics for choosing this subset have been developed, including delay bounding [15], preemption bounding [36], and probabilistic strategies [10]. Such techniques can be effective in finding bugs in concurrent programs, but not prove their absence.

8 Conclusion

In this paper, we have presented POP, a new optimal DPOR algorithm for analyzing multi-threaded programs under SC. POP combines several novel algorithmic techniques, which allow efficiency improvements over previous such DPOR algorithms, both in time and space. In particular, its space consumption is polynomial in the size of the analyzed program. Our experiments on a wide variety of benchmarks show that POP always outperforms Optimal DPOR, the state-of-the-art sequence-based optimal DPOR algorithm, and offers performance comparable with TruSt, the state-of-the-art graph-based DPOR algorithm. Moreover, by being sequence-based, its implementation scales much better than TruSt's on programs with long executions.

As future work, it would be interesting to investigate the effect of applying POP's novel algorithmic techniques on DPOR algorithms tailored for different computational models, and for analyzing programs under weak concurrency memory models such as TSO and PSO.

Acknowledgements This research was partially funded by the Swedish Research Council (Vetenskapsrådet) and the Swedish Foundation for Strategic Research

through project aSSIsT. We thank these funding agencies and the CAV 2024 reviewers for their comments.

References

- Abdulla, P., Aronis, S., Jonsson, B., Sagonas, K.: Optimal dynamic partial order reduction. In: Symposium on Principles of Programming Languages. pp. 373–384. POPL 2014, ACM, New York, NY, USA (2014). https://doi.org/10.1145/2535838. 2535845, http://doi.acm.org/10.1145/2535838.2535845
- Abdulla, P.A., Aronis, S., Atig, M.F., Jonsson, B., Leonardsson, C., Sagonas, K.: Stateless model checking for TSO and PSO. In: Tools and Algorithms for the Construction and Analysis of Systems. LNCS, vol. 9035, pp. 353–367. Springer, Berlin, Heidelberg (2015). https://doi.org/10.1007/978-3-662-46681-0_28, http://dx.doi.org/10.1007/978-3-662-46681-0_28
- Abdulla, P.A., Aronis, S., Jonsson, B., Sagonas, K.: Source sets: A foundation for optimal dynamic partial order reduction. Journal of the ACM 64(4), 25:1–25:49 (Sep 2017). https://doi.org/10.1145/3073408, http://doi.acm.org/10.1145/3073408
- Abdulla, P.A., Atig, M.F., Bønneland, F.M., Das, S., Jonsson, B., Lång, M., Sagonas, K.: Tailoring stateless model checking for event-driven multi-threaded programs. In: André, É., Sun, J. (eds.) Automated Technology for Verification and Analysis 21st International Symposium, ATVA 2023, Proceedings, Part II. LNCS, vol. 14216, pp. 176–198. Springer (Oct 2023). https://doi.org/10.1007/978-3-031-45332-8-9, https://doi.org/10.1007/978-3-031-45332-8-9
- Abdulla, P.A., Atig, M.F., Jonsson, B., Lång, M., Ngo, T.P., Sagonas, K.: Optimal stateless model checking for reads-from equivalence under sequential consistency. Proc. ACM Program. Lang. 3(OOPSLA), 150:1–150:29 (Oct 2019). https://doi. org/10.1145/3360576, https://doi.org/10.1145/3360576
- Abdulla, P.A., Atig, M.F., Jonsson, B., Leonardsson, C.: Stateless model checking for POWER. In: Computer Aided Verification. LNCS, vol. 9780, pp. 134–156. Springer International Publishing, Cham (2016). https://doi.org/10.1007/978-3-319-41540-6_8, http://dx.doi.org/10.1007/978-3-319-41540-6_8
- Abdulla, P.A., Atig, M.F., Jonsson, B., Ngo, T.P.: Optimal stateless model checking under the release-acquire semantics. Proc. ACM on Program. Lang. 2(OOPSLA), 135:1–135:29 (2018). https://doi.org/10.1145/3276505, http://doi.acm.org/10.1145/ 3276505
- Albert, E., de la Banda, M.G., Gómez-Zamalloa, M., Isabel, M., Stuckey, P.J.:
 Optimal dynamic partial order reduction with context-sensitive independence and
 observers. J. Syst. Softw. 202, 111730 (2023). https://doi.org/10.1016/J.JSS.2023.
 111730, https://doi.org/10.1016/j.jss.2023.111730
- Aronis, S., Jonsson, B., Lång, M., Sagonas, K.: Optimal dynamic partial order reduction with observers. In: Tools and Algorithms for the Construction and Analysis of Systems - 24th International Conference. LNCS, vol. 10806, pp. 229– 248. Springer, Cham (Apr 2018). https://doi.org/10.1007/978-3-319-89963-3_14, https://doi.org/10.1007/978-3-319-89963-3_14
- Burckhardt, S., Kothari, P., Musuvathi, M., Nagarakatte, S.: A randomized scheduler with probabilistic guarantees of finding bugs. In: Proceedings of the Fifteenth Edition of ASPLOS on Architectural Support for Programming Languages and Operating Systems. pp. 167–178. ASPLOS XV, ACM, New York, NY, USA (2010). https://doi.org/10.1145/1736020.1736040, http://doi.org/10.1145/1736020.1736040

- Chalupa, M., Chatterjee, K., Pavlogiannis, A., Sinha, N., Vaidya, K.: Data-centric dynamic partial order reduction. Proc. ACM on Program. Lang. 2(POPL), 31:1–31:30 (Jan 2018). https://doi.org/10.1145/3158119, http://doi.acm.org/10.1145/3158119
- Chatterjee, K., Pavlogiannis, A., Toman, V.: Value-centric dynamic partial order reduction. Proc. ACM Program. Lang. 3(OOPSLA), 124:1–124:29 (Oct 2019). https://doi.org/10.1145/3360550, https://doi.org/10.1145/3360550
- Christakis, M., Gotovos, A., Sagonas, K.: Systematic testing for detecting concurrency errors in Erlang programs. In: Sixth IEEE International Conference on Software Testing, Verification and Validation. pp. 154–163. ICST 2013, IEEE, Los Alamitos, CA, USA (Mar 2013). https://doi.org/10.1109/ICST.2013.50, https://doi.org/10.1109/ICST.2013.50
- Demsky, B., Lam, P.: SATCheck: SAT-directed stateless model checking for SC and TSO. In: Proceedings of the 2015 ACM SIGPLAN International Conference on Object-Oriented Programming, Systems, Languages, and Applications. pp. 20–36. OOPSLA 2015, ACM, New York, NY, USA (2015). https://doi.org/10.1145/2814270.2814297, http://doi.acm.org/10.1145/2814270.2814297
- Emmi, M., Qadeer, S., Rakamaric, Z.: Delay-bounded scheduling. In: Proceedings of the 38th ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages. pp. 411–422. POPL 2011, ACM (Jan 2011). https://doi.org/10.1145/ 1926385.1926432, https://doi.org/10.1145/1926385.1926432
- Flanagan, C., Godefroid, P.: Dynamic partial-order reduction for model checking software. In: Principles of Programming Languages, (POPL). pp. 110–121. ACM, New York, NY, USA (Jan 2005). https://doi.org/10.1145/1040305.1040315, http://doi.acm.org/10.1145/1040305.1040315
- 17. Godefroid, P.: Partial-Order Methods for the Verification of Concurrent Systems: An Approach to the State-Explosion Problem. Ph.D. thesis, University of Liège (1996). https://doi.org/10.1007/3-540-60761-7, http://www.springer.com/gp/book/9783540607618, also, volume 1032 of LNCS, Springer.
- 18. Godefroid, P.: Model checking for programming languages using VeriSoft. In: Principles of Programming Languages, (POPL). pp. 174–186. ACM Press, New York, NY, USA (Jan 1997). https://doi.org/10.1145/263699.263717, http://doi.acm.org/10.1145/263699.263717
- 19. Godefroid, P.: Software model checking: The VeriSoft approach. Formal Methods in System Design **26**(2), 77–101 (Mar 2005). https://doi.org/10.1007/s10703-005-1489-x, http://dx.doi.org/10.1007/s10703-005-1489-x
- 20. Godefroid, P., Hanmer, R.S., Jagadeesan, L.: Model checking without a model: An analysis of the heart-beat monitor of a telephone switch using VeriSoft. In: Proceedings of the ACM SIGSOFT International Symposium on Software Testing and Analysis. pp. 124–133. ISSTA, ACM, New York, NY, USA (Mar 1998). https://doi.org/10.1145/271771.271800
- Huang, J.: Stateless model checking concurrent programs with maximal causality reduction. In: Proceedings of the 36th ACM SIGPLAN Conference on Programming Language Design and Implementation. pp. 165–174. PLDI 2015, ACM, New York, NY, USA (2015). https://doi.org/10.1145/2737924.2737975, http://doi.acm.org/10. 1145/2737924.2737975
- 22. Jensen, C.S., Møller, A., Raychev, V., Dimitrov, D., Vechev, M.T.: Stateless model checking of event-driven applications. In: Proceedings of the 2015 ACM SIGPLAN International Conference on Object-Oriented Programming, Systems, Languages, and Applications. pp. 57–73. OOPSLA 2015, ACM, New York, NY, USA (2015). https://doi.org/10.1145/2814270.2814282

- 23. Jonsson, B., Lång, M., Sagonas, K.: Awaiting for Godot: Stateless model checking that avoids executions where nothing happens. In: Griggio, A., Rungta, N. (eds.) 22nd Formal Methods in Computer-Aided Design. pp. 284–293. FMCAD 2022, IEEE (Oct 2022). https://doi.org/10.34727/2022/ISBN.978-3-85448-053-2_35, https://doi.org/10.34727/2022/isbn.978-3-85448-053-2_35
- 24. Kähkönen, K., Saarikivi, O., Heljanko, K.: Using unfoldings in automated testing of multithreaded programs. In: IEEE/ACM International Conference on Automated Software Engineering. pp. 150–159. ASE'12, ACM, New York, NY, USA (2012). https://doi.org/10.1145/2351676.2351698, http://dl.acm.org/citation.cfm?id=2351676
- 25. Kastenberg, H., Rensink, A.: Dynamic partial order reduction using probe sets. In: van Breugel, F., Chechnik, M. (eds.) Concurrency Theory. LNCS, vol. 5201, pp. 233–247. Springer (2008). https://doi.org/10.1007/978-3-540-85361-9_21
- Kokologiannakis, M., Lahav, O., Sagonas, K., Vafeiadis, V.: Effective stateless model checking for C/C++ concurrency. Proc. ACM on Program. Lang. 2(POPL), 17:1–17:32 (Jan 2018). https://doi.org/10.1145/3158105, https://doi.org/10.1145/ 3158105
- Kokologiannakis, M., Marmanis, I., Gladstein, V., Vafeiadis, V.: Truly stateless, optimal dynamic partial order reduction. Proc. ACM Program. Lang. 6(POPL), 1–28 (2022). https://doi.org/10.1145/3498711, https://doi.org/10.1145/3498711
- Kokologiannakis, M., Raad, A., Vafeiadis, V.: Model checking for weakly consistent libraries. In: Proceedings of the 40th ACM SIGPLAN Conference on Programming Language Design and Implementation. pp. 96–110. PLDI 2019, ACM, New York, NY, USA (Jun 2019). https://doi.org/10.1145/3314221.3314609, https://doi.org/ 10.1145/3314221.3314609
- Kokologiannakis, M., Ren, X., Vafeiadis, V.: Dynamic partial order reductions for spinloops. In: Formal Methods in Computer Aided Design. pp. 163–172. FMCAD 2021, IEEE (Oct 2021). https://doi.org/10.34727/2021/isbn.978-3-85448-046-4_25, https://doi.org/10.34727/2021/isbn.978-3-85448-046-4_25
- 30. Kokologiannakis, M., Sagonas, K.: Stateless model checking of the Linux kernel's read–copy update (RCU). Software Tools for Technology Transfer 21(3), 287–306 (Jun 2019). https://doi.org/10.1007/s10009-019-00514-6, https://doi.org/10.1007/s10009-019-00514-6
- 31. Kokologiannakis, M., Vafeiadis, V.: HMC: model checking for hardware memory models. In: Larus, J.R., Ceze, L., Strauss, K. (eds.) Architectural Support for Programming Languages and Operating Systems. pp. 1157–1171. ASPLOS '20, ACM (Mar 2020). https://doi.org/10.1145/3373376.3378480, https://doi.org/10.1145/3373376.3378480
- 32. Kokologiannakis, M., Vafeiadis, V.: GenMC: A model checker for weak memory models. In: Computer Aided Verification 33rd International Conference, CAV 2021, Proceedings, Part I. LNCS, vol. 12759, pp. 427–440. Springer (Jul 2021). https://doi.org/10.1007/978-3-030-81685-8_20, https://doi.org/10.1007/978-3-030-81685-8_20
- 33. Maiya, P., Gupta, R., Kanade, A., Majumdar, R.: Partial order reduction for event-driven multi-threaded programs. In: Chechik, M., Raskin, J. (eds.) Tools and Algorithms for the Construction and Analysis of Systems (TACAS 2016). LNCS, vol. 9636, pp. 680–697. Springer, Berlin, Heidelberg (Apr 2016). https://doi.org/10. 1007/978-3-662-49674-9_44, https://doi.org/10.1007/978-3-662-49674-9_44
- 34. Mazurkiewicz, A.: Trace theory. In: Brauer, W., Reisig, W., Rozenberg, G. (eds.) Petri Nets: Applications and Relationships to Other Models of Concurrency. LNCS, vol. 255, pp. 279–324. Springer, Berlin Heidelberg (1987). https://doi.org/10.1007/3-540-17906-2_30, http://dx.doi.org/10.1007/3-540-17906-2_30

- 35. McMillan, K.L.: A technique of a state space search based on unfolding. Formal Methods in System Design $\mathbf{6}(1)$, 45–65 (1995). https://doi.org/10.1007/BF01384314, https://doi.org/10.1007/BF01384314
- Musuvathi, M., Qadeer, S.: Iterative context bounding for systematic testing of multithreaded programs. In: Proceedings of the ACM SIGPLAN 2007 Conference on Programming Language Design and Implementation. pp. 446–455. PLDI 2007, ACM (Jun 2007). https://doi.org/10.1145/1250734.1250785, https://doi.org/10. 1145/1250734.1250785
- 37. Musuvathi, M., Qadeer, S., Ball, T., Basler, G., Nainar, P.A., Neamtiu, I.: Finding and reproducing heisenbugs in concurrent programs. In: Proceedings of the 8th USENIX Symposium on Operating Systems Design and Implementation. pp. 267–280. OSDI '08, USENIX Association, Berkeley, CA, USA (Dec 2008), http://dl.acm.org/citation.cfm?id=1855741.1855760
- 38. Nguyen, H.T.T., Rodríguez, C., Sousa, M., Coti, C., Petrucci, L.: Quasi-optimal partial order reduction. In: Chockler, H., Weissenbacher, G. (eds.) Computer Aided Verification. LNCS, vol. 10982, pp. 354–371. Springer, Cham (2018). https://doi.org/10.1007/978-3-319-96142-2.22
- Norris, B., Demsky, B.: A practical approach for model checking C/C++11 code.
 ACM Trans. Program. Lang. Syst. 38(3), 10:1-10:51 (May 2016). https://doi.org/10.1145/2806886, http://doi.acm.org/10.1145/2806886
- 40. Palmer, R., Gopalakrishnan, G., Kirby, R.M.: Semantics driven dynamic partial-order reduction of MPI-based parallel programs. In: Ur, S., Farchi, E. (eds.) Proceedings of the 5th Workshop on Parallel and Distributed Systems: Testing, Analysis, and Debugging. pp. 43–53. PADTAD 2007, ACM (Jul 2007). https://doi.org/10.1145/1273647.1273657
- Rodríguez, C., Sousa, M., Sharma, S., Kroening, D.: Unfolding-based partial order reduction. In: 26th International Conference on Concurrency Theory (CONCUR 2015). LIPIcs, vol. 42, pp. 456–469. Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik (Aug 2015). https://doi.org/10.4230/LIPIcs.CONCUR.2015.456, http://dx.doi.org/10.4230/LIPIcs.CONCUR.2015.456
- 42. Sen, K., Agha, G.: A race-detection and flipping algorithm for automated testing of multi-threaded programs. In: Hardware and Software, Verification and Testing. LNCS, vol. 4383, pp. 166–182. Springer, Berlin Heidelberg (2007). https://doi.org/10.1007/978-3-540-70889-6_13, https://doi.org/10.1007/978-3-540-70889-6_13
- SV-COMP: Competition on Software Verification. https://sv-comp.sosy-lab.org/ 2019 (2019), [Online; accessed 2019-03-24]
- Tasharofi, S., Karmani, R.K., Lauterburg, S., Legay, A., Marinov, D., Agha, G.: TransDPOR: A novel dynamic partial-order reduction technique for testing actor programs. In: Giese, H., Rosu, G. (eds.) Formal Techniques for Distributed Systems. LNCS, vol. 7273, pp. 219–234. Springer, Berlin Heidelberg (2012). https://doi.org/ 10.1007/978-3-642-30793-5_14
- 45. Thomson, P., Donaldson, A.F., Betts, A.: Concurrency testing using controlled schedulers: An empirical study. ACM Trans. Parallel Comput. 2(4), 23:1–23:37 (2016). https://doi.org/10.1145/2858651, http://doi.acm.org/10.1145/2858651
- 46. Zhang, N., Kusano, M., Wang, C.: Dynamic partial order reduction for relaxed memory models. In: Programming Language Design and Implementation (PLDI). pp. 250–259. ACM, New York, NY, USA (Jun 2015). https://doi.org/10.1145/2737924.2737956, http://doi.acm.org/10.1145/2737924.2737956